

Model No.

8XD4

Recessed Steel Enclosure

- For use with 8" speaker
- For new or existing construction

Construction & Features

- **Material:** U.S. steel
- **Size:** 10" dia. x 4" deep, tapered
- **Volume:** 0.147 cu.ft.
- **Knockouts:** One planished (0.5") knockout on top to preserve leak-free integrity of enclosure in return air plenums. Four (0.5-0.75") side knockouts placed at 90-degree intervals.
- **Lining:** Polyurethane foam disc helps reduce acoustic or mechanical resonance. Disc meets UL flammability CAL-117 for resonance and vibration control.
- **Hardware:** Factory-installed 8-32 retaining clips can be used to mount a standard screw-mount grille
- **Finish:** White powder epoxy
- **Origin:** Made in the U.S.A. with 100% Certified U.S. steel

A&E Specifications

The enclosure for recessed installation of an 8 in. driver shall be Lowell Model No. 8XD4, which shall be fabricated of certified U.S. steel and have a white powder epoxy finish. The unit shall have a diameter of 10 inches and a depth of 4 inches. It shall include a polyurethane foam disc that is UL Listed to meet flammability CAL-117 for resonance and vibration control. The enclosure shall also feature one planished (0.5 in.) knockout on top and four (0.5 to 0.75 in.) knockouts on sides (spaced at a 90-degree interval).

Model Number

Model No.	Description	Diameter (in)	Depth (in)	Volume (cu.ft.)	Lining	Top Knockout	Side Knockouts
8XD4	Steel enclosure	10	4	0.147	foam disc	1	4

Diameter measurement is outside backbox cylinder.




Includes polyurethane foam disc to help reduce acoustic or mechanical resonance



Tapered for stackability



Drawings

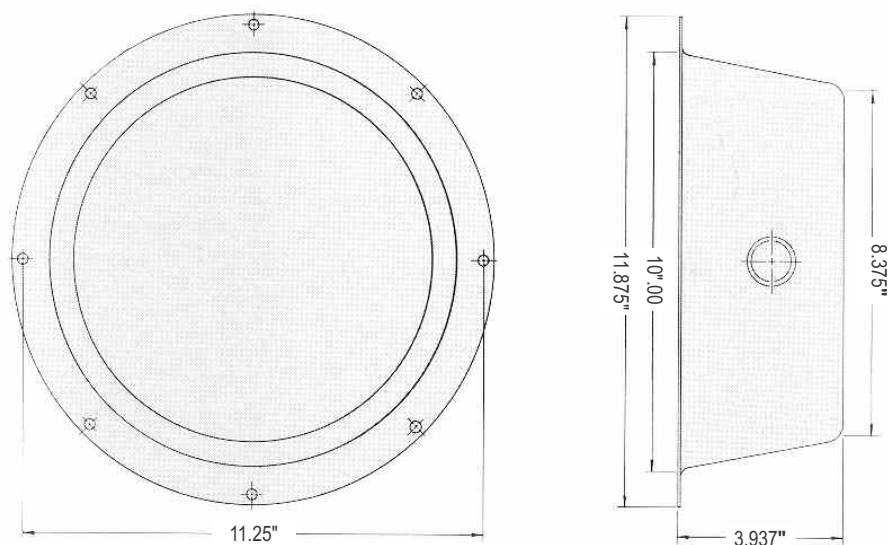

Compatible Components (order separately)

SPEAKERStandard 8" E.I.A. driver with magnet weight not more than 10 oz., mounted transformer with taps not more than 8W.

GRILLEModel No's. A8-AW, CS-8H, LO-8P, RS8-AW, WB8, WB-8H

TILE-BRIDGEModel No's. LBS8, LBS8-R1