

SPECIFICATION DATA

Simultaneous Interpretation • Audio Description • Media Rooms • Conferences • Boardrooms •  
Courtrooms • Schools • Universities • Cinemas • Churches

# WIR TX925

## Infrared System

The WIR TX925 is ideal for simultaneous language interpretation for up to two languages. It can operate up to 19,000 sq ft in two channel mode or up to 30,000 in single channel mode. Operating on 2.3 and 2.8 MHz, the WIR TX925 is less susceptible to traditional radio and lighting interference. Listen to the program with the optional RX22-4 four-channel receiver or the RX18 two-channel/stereo receiver.




# SoundPlus® Infrared System

## Specifications - MOD 232

Size, Weight:	8.5" W x 8.2" D x 1.7" H (21.5 cm x 20.8 cm x 4.4 cm), 3.1 lbs (1.5 kg)
Color:	Black epoxy paint with white legends
Rack Mount:	1/2 rack space wide, 1 rack space high, one or two modulators may be mounted in a single IEC rack space with RPK 005 (single) or RPK 006 (double) Rack Mount Kits
Power Supply:	Wall Transformer, 24 VAC, 50-60 Hz, 15 VA
North America:	TFP 016, UL/CSA
Europe:	TFP 027-01, 2-pin Schuko plug, CE
UK:	TFP 027-02, 3-pin UK plug, CE
Modulation:	FM Wideband, +50kHz deviation, 50uS pre-emphasis
Carrier Frequency:	Channel A: Selectable, 2.3/2.8/3.3/3.8 MHz,
Channel B:	Selectable, 2.3/2.8/3.3/3.8 MHz
Signal-to-Noise Ratio:	More than 60dB
Frequency Response:	30 to 16,000 Hz, +1 dB, -3 dB, electrical response
Total Harmonic Distortion:	Less than 2%, electrical response
Audio Processing:	Compression (slope) adjustable from 1:1 or 2:1
Switchable compression gain:	Moderate: 16 dB. Max: 33 dB
Auto Carrier Shut-Off:	15-minute timer shuts off carrier when no audio is present (can be disabled)

## MOD 232 Front Panel

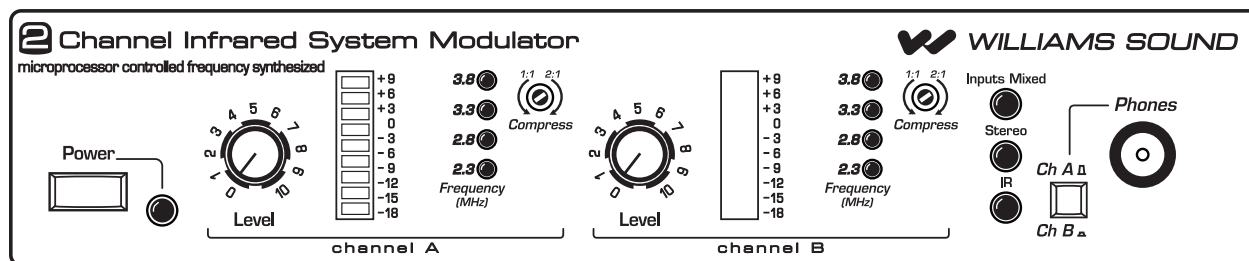


A133

Power Switch:	Two-position push button, ON/OFF
Power Indicator:	Green LED
Audio Level Controls:	CH A and CH B Input Level, rotary knobs
Audio Indicators:	CH A and CH B Audio Level, 10-segment LED's
Carrier LEDs:	4 green LED carrier "on" indicators per channel (indicates frequency, malfunctions)
Compress Control:	1:1 or 2:1
Input Mix LED:	Indicates inputs A and B audio are mixed and transmitted by CH A, CH B off
Stereo LED:	Indicates stereo mode
Phones Switch:	Selects CH 1 or CH 2 for phones when not in stereo mode
Phones Output:	1/4" TRS headphone jack. Accepts stereo, mono, and any impedance phones.
Infrared Test LED:	IR LED for receiver testing, monitoring, and audio signal testing.

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!**

# SoundPlus® Infrared System

## MOD 232 Rear Panel

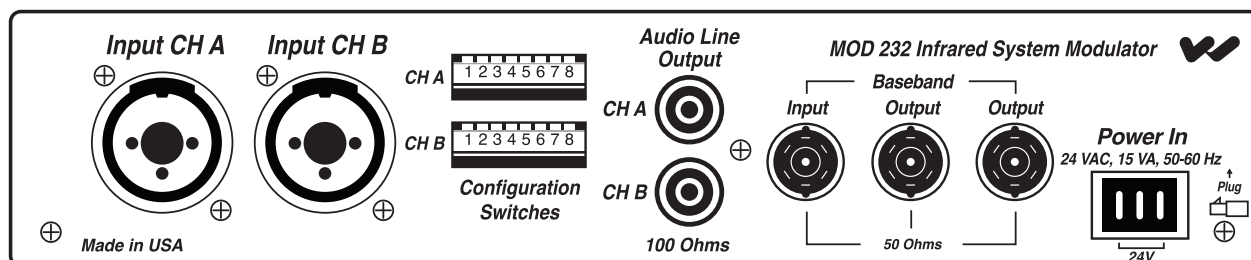

A134

Power Input:	3-Pin Molex, 24 VAC, 50-60 Hz, 15 VA
Audio Input Jack:	CH A and CH B combination XLR/TRS jack
Mic Level:	Balanced, Lo-Z, 100 $\mu$ V min. to 90 mV max., 1mV nominal, 3 k $\Omega$ input impedance, supplies switchable simplex power per DIN 45596 for condenser mics
Line Level:	Balanced or unbalanced, 21 mV min. to 10 V max., 212 mV nominal, 100 k $\Omega$
Audio Line Output Jacks:	RCA Jack, CH A and CH B, 500 mV, unbalanced, 100 $\Omega$ source impedance, load impedance must be greater than 1 k $\Omega$
Configuration Switches:	CHA and CHB 8-position DIP switch, selects Mic/Line input, compressor gain, simplex power, discrete or mixed inputs, carrier frequency, channel disable, auto shut-off timer
Baseband Input Jack:	BNC, allows mixing with additional MOD 232 Modulator (4CH operation), 100mV, 50 $\Omega$ input impedance, use with MOD 232, BNC, RG-58 Cable
Baseband Output Jack:	Two BNC jacks carry baseband signal, 100 mV/channel, 50 $\Omega$ source impedance, for use with WIR TX9 or MOD 232 only
Approvals:	CE, FCC, RoHS, WEEE
Operating Requirements:	0-50° C ambient temperature, non-condensing, non-corrosive atmosphere
Warranty:	5 years on modulator, 90 days on accessories


## Specifications - WIR TX9 DC Emitter

Dimensions, Weight:	11.25" W x 6.25" H x 2.125" D (28.6 cm x 15.9 cm x 5.4 cm), 1.8 lbs (0.8 kg)
Color:	Black with white legends, black acrylic lens (optional white enclosure available)
Power Supply:	Desktop-style, universal power supply. Input: 100-240 VAC, 50/60 Hz, 0.6A. Line cord specified by country of use. Output: 24 VDC, 1.0 A, 25W. Barrel connector. 50 ft DC power supply extension cable available (WCA 123).
Carrier Frequency:	Accommodates baseband sub carriers from 2.3-3.8 MHz
Emitter IR Power:	3.5 watts
Coverage Area:	30,000 sq. ft. (2,787 sq. m) in single channel mode when using the RX22-4 Receiver 19,000 sq. ft. (1,765 sq. m) in two channel mode when using the RX22-4 Receiver 11,000 sq. ft. (1,022 sq. m) in four channel mode when using the RX22-4 Receiver 3,350 sq. ft. (311 sq. m) in single channel mode when using the RX18 Receiver
Baseband Indicator:	Red LED
Power Indicator:	Red LED
Auto Carrier Shut-Off:	Turns off LEDs when no baseband is present
Power Input:	24 VDC, 0.8 A
Baseband Input:	BNC, 50 $\Omega$ , for use with MOD 232, TX 90, TX 90 DC, TX 9 and TX 9 DC
Baseband Output:	BNC, 50 $\Omega$ , for use with TX 9 or TX 9 DC only
Baseband Cable:	RG 58 Coax, BNC Connectors, maximum 1000 ft (300 m) length.
Operating Requirements:	32-122 °F (0-50 °C), ambient temperature, non-condensing, non-corrosive atmosphere
Mounting Kits:	Wall or Ceiling Mount: BKT 024 Omnidirectional mount; Optional: Tripod Stands: SS-11 or SS-6
Warranty:	5 years on transmitter (90 days on accessories)
Approvals:	CE, FCC, RoHS, WEEE
Compatible Receivers:	WIR RX22-4 Four-Channel Receiver; WIR RX18 Two-Channel Receiver
Notes:	Specifications: Single end input, volume & tone controls at mid point, 1 kHz, "Music" Preset


**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**

# Infrared System

## WIR TX9 DC Rear Panel

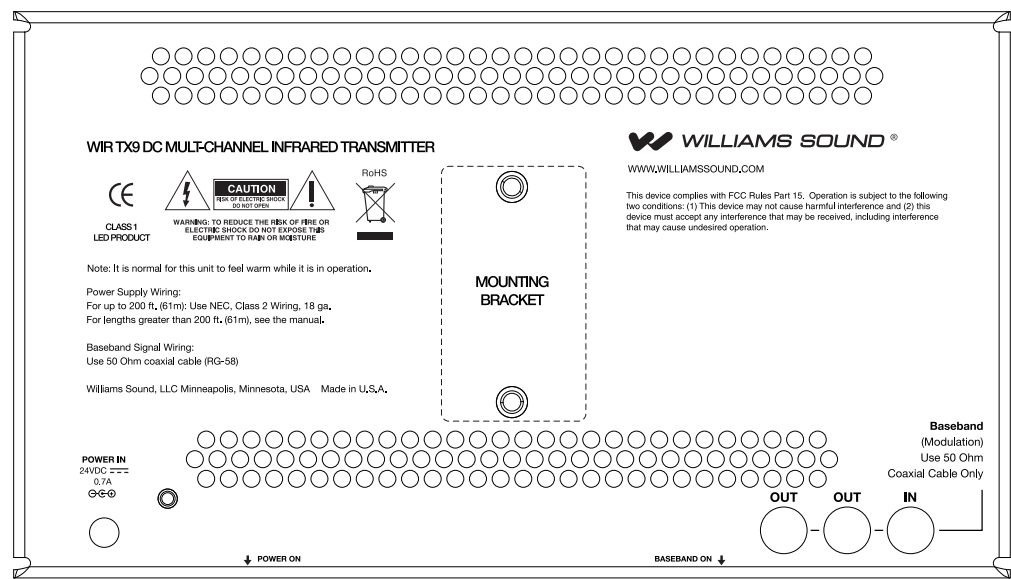

## Receiver Coverage Area with TX9 DC Emitter in Single Channel Mode

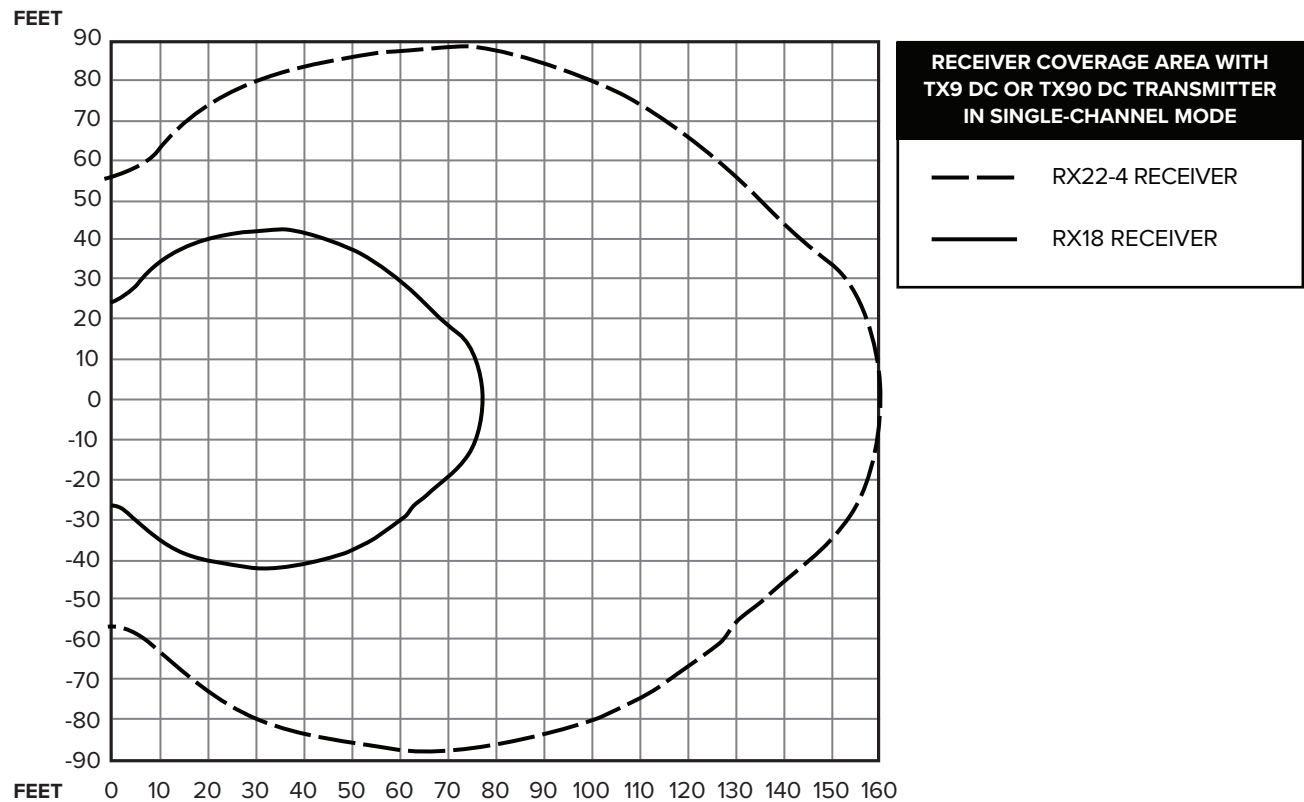


The coverage area for the TX9 DC will vary depending on the receiver being used. The diagram above demonstrates the receiver coverage when operating a single TX9 DC emitter in single channel mode. Patterns are direct radiation patterns.

**Note:** Reflections of the infrared light from walls, ceilings and floors may change these patterns.

**NOTE:** SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

# Infrared System

## WIR RX22-4 Receiver:

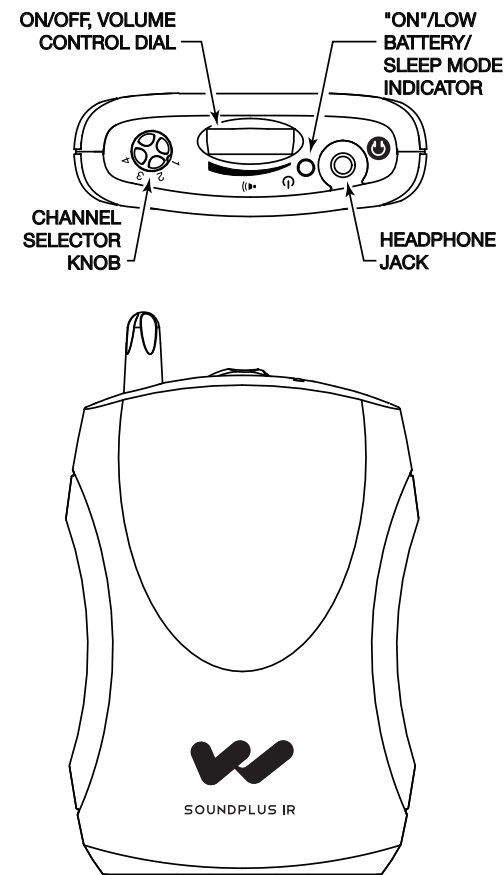


Receiver Style:	Body-Pack, dual-lens detector, lanyard
Size:	4.5" L x 2.85" W x 1.2" H (114.3 mm x 72.4 mm x 30.4 mm)
Weight:	4.6 oz (130 g) with batteries
Color and Material:	Black
Lanyard:	3 ft (.91 m), allows receiver to be worn around the neck
Operating Temperature:	-10° C to +50° C
Battery Type:	2 x AA, alkaline (BAT 001) or NiMH (BAT 026)
Battery Life:	Alkaline: 60 hours, NiMH: 30 hours/charge
Battery Drain:	25 mA, nominal
Charging Contacts:	For use only with CHG 3512
Carrier Frequency:	Channel 1: 2.3 MHz, Channel 2: 2.8 MHz Channel 3: 3.3 MHz, Channel 4: 3.8 MHz
De-Emphasis:	50 uS
FM Deviation:	±50 kHz
Signal-to-Noise Ratio:	60dB min.
Squelch:	Receiver squelches (mutes) at 40 dB S/N ratio
Frequency Response:	25 Hz to 16 KHz, +1 dB, -3 dB, electrical response
Total Harmonic Distortion:	Less than 1%, electrical response
Controls:	ON/OFF/VOLUME: combination thumbwheel knob Channel Selector: four-position rotary switch
Indicators:	Red LED "ON" indicator, flashes red to indicate Low battery
Audio Output Jacks:	3.5 mm stereo mini phone jack Accepts 3.5 mm mono or stereo phone plug
Audio Output Power:	15 mW max at 32 Ω
Acoustic Output:	110 dB SSPL90 w/ EAR 013
Sensitivity:	Better than 1 nW/cm2 for 40 dB signal-to-noise ratio
Approvals:	CE, FCC, RoHS, WEEE
Warranty:	5 years on receiver, 90 days on accessories
Compatible Headphones/ Earphones:	Mono or stereo, 8-32 ohms, 3.5 mm mini phone plug, HED 021, HED 026, HED 027, EAR 013, EAR 014, EAR 022, EAR 049, NKL 001, EAR 041, EAR 042

NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!

# Infrared System


## Two Channel System:

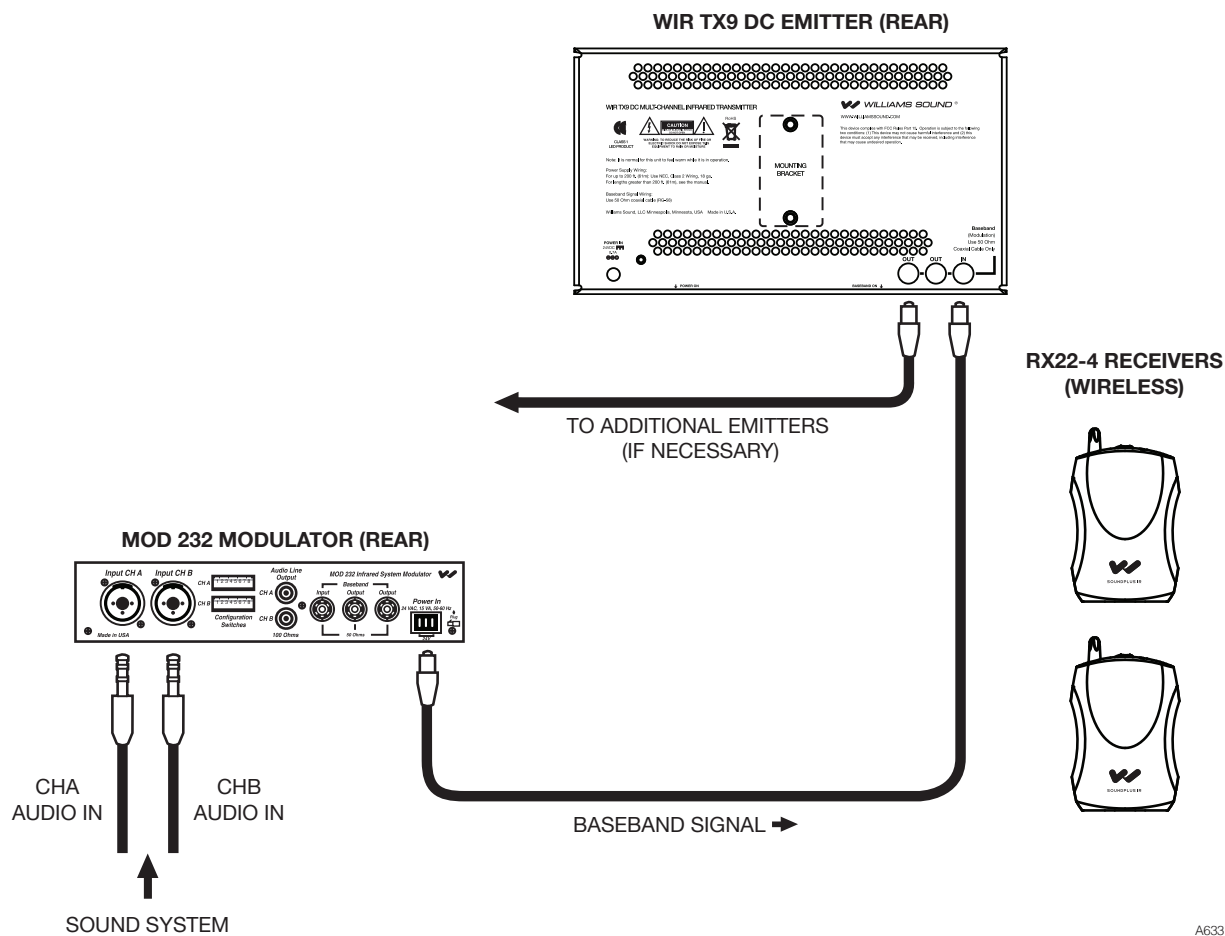

A633

## Specifications - WIR RX18 Receiver

Weight:	2.1 oz (60 g) with batteries
Material and Color:	ABS plastic, Black and Grey
Battery Type, Life:	BAT AP11A NiMH Battery Pack, 7 hours
Modulation Frequency:	2.3 MHz or 2.8 MHz or stereo
Frequency Response:	200 Hz to 8 kHz, $\pm 5$ dB
Signal-to-Noise Ratio:	60 dB at 10 m
Controls:	Volume control thumbwheel 3-position selection switch (2.3 MHz, 2.8 MHz, stereo) Screwdriver adjust balance and (L & R) tone controls
Acoustic Output:	120 dB MAX SSPL90 with 2 cc coupler
Compatibility:	Compatible with 2.3 MHz and 2.8 MHz IR transmitters, WIR TX925 and WIR SYS 1 systems
Power Switch:	Built into receiver "arms"
Ear tips:	Uses EAR 240 silicon tips
Approvals:	CE, RoHS, WEEE
Warranty:	5 years (90 days on battery)

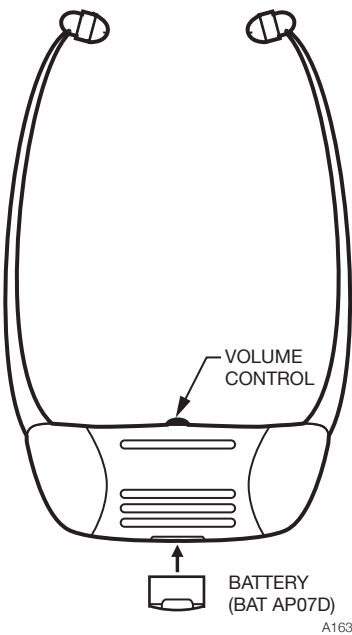

A163

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.**

# Infrared System

---

## Architectural/Engineering Specifications

### Modulator, Model MOD 232

The infrared system shall consist of separate modulator and emitter units, with portable receivers. The modulator unit shall be a half-rack style, metal enclosure. A rack panel shall be available to mount one or two modulator units within a single EIA rack space. An adjustable floor stand and mounting bracket shall be available to mount the modulator and emitter together for portable operation.

The modulator shall provide two channels of selectable FM carrier signals; 2.3/2.8/3.3/3.8 MHz, so that a single modulator can be used to simultaneously transmit up to two channels, and two modulators can be ganged together to transmit up to four channels simultaneously. The carrier signals shall use 50 kHz deviation and 50  $\mu$ S pre-emphasis. The carrier signals (baseband) shall be transmitted to one or more emitters by 50 ohm RG58 coaxial cable with BNC-type connectors. A BNC-type baseband input jack and baseband output jack shall be provided on the modulator. The modulator shall be powered by an external 24 VAC, 10 VA, 50-60 Hz power supply, connected via a three-pin Molex power connector.

It shall have a rocker-type power switch, power LED indicator, four carrier indicator LEDs and two bar graph-type LED audio indicators. The modulator shall have a modulated IR LED on the front panel for testing purposes, and a headphone jack that accommodates mono and stereo 1/4" headphones, and channel monitoring switch. The modulator shall have two rotary audio input level controls, and a screwdriver adjustable control for varying the input compression from 1:1 or 2:1. The modulator shall have two timers that automatically shut off the carriers when there is no audio signal present for 15 minutes. The modulator shall have two combination input jacks that accept 3-pin XLR plugs for balanced microphone input or 1/4" TRS plugs for balanced or unbalanced line-level inputs. The XLR inputs shall be low impedance, accept signal levels from 100  $\mu$ V to 90 mV and supply 15 V simplex power per DIN45596. The TRS jacks shall accept balanced or unbalanced audio signal levels from 21 mV to 10 V. The modulator shall have CE, FCC, RoHS, and WEEE approval and carry a five-year parts and labor warranty.

The modulator shall be the Williams Sound model MOD 232.

### Emitter, Model WIR TX9 DC

The emitter shall be contained in a metal enclosure with a shatter-resistant lens. The emitter shall include an omni-directional mounting bracket for permanent installation and a bracket shall be available for mounting on a floor stand for portable installations. Each emitter shall be powered by a universal power supply with an output of 24 VDC, 1.0 A, 25 W. The power connector shall be a barrel style. The emitter shall have a BNC-type 50 ohm baseband input and 2 BNC-type baseband 50 ohm output jack. The emitter shall have a repeater circuit to allow multiple numbers of emitters to operate from the baseband signal. The emitter shall have a visible LED indicator for power and for baseband signal. Carrier frequency is 2.3 MHz to 3.8 MHz. The emitter shall shut off when the baseband signal is not present. The emitter shall provide an effective coverage area of up to 30,000 sq ft (2,787 sq m) in single-channel mode and up to 19,000 sq. ft. (1,765 sq. m.) in two-channel mode when using the RX22-4, or RX18 receivers. The emitter shall be convection-cooled, without fans. The emitter shall have CE, FCC, RoHS, and WEEE approval and carry a five-year warranty on parts and labor.

The emitter shall be Williams Sound model WIR TX9 DC.

### Four-Channel Receiver, Model RX22-4

The receiver shall be a body-pack type with IR detector lens behind face of the unit. The unit shall have a lanyard for hands-free operation. The receiver shall have a rotary-type volume control. The receiver shall operate for 60 hours with two AA alkaline batteries and for 30 hours per charge with NiMH AA batteries. The receiver shall be charged without battery removal via charger contacts in the case. A drop-in charger accessory shall recharge the batteries in 8 hours when used with CHG 3512 charger. The receiver shall be housed in an impact resistant plastic case with a hinged battery door that does not separate from the receiver. The receiver shall receive 2.3 MHz, 2.8 MHz, 3.3 MHz or 3.8 MHz modulated IR signals with 50  $\mu$ S de-emphasis. The receiver shall have a 3.5 mm stereo phone jack and accommodate low-impedance mono or stereo earphones and headphones. The receiver shall accommodate neckloop telecoil couplers. The receivers shall provide 110 dB SSPL90 output with EAR 013 earbud-type earphone.

The system electrical frequency response shall be 25 Hz to 16 kHz, +1, -3 dB and the signal-to-noise ratio shall be 60 dB. The receiver shall have CE, FCC, RoHS, and WEEE approval. The receiver shall be covered by a five-year parts and labor warranty, excluding earphones, headphones, batteries and chargers.

The receiver shall be the Williams model WIR RX22-4.

### Receiver, Model WIR RX18

The receiver shall be an under-chin stetho style with an IR detector lens in the face of the unit. The receiver shall have a rotary type volume control and the power switch shall be built into the arms of the unit so it will automatically shut off when not in use. The receiver shall operate for seven hours per charge with the BAT AP11A NiMH battery pack. The receiver shall be housed in a black and grey plastic case. The receiver shall have a three position selector switch for 2.3 MHz, stereo or 2.8 MHz modulated IR signals. The receiver shall provide 120dB SSPL90 output. The system electrical frequency response shall be 200Hz to 8kHz and the signal to noise ratio shall be 60dB at 10m. The receiver shall have CE, RoHS and WEEE approval and be covered by a five-year parts and labor warranty (90 days on battery pack).

The receiver shall be the Williams Sound model WIR RX18.

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!**

# Infrared System

---

**NOTE: SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE!**

## **Domestic Sales**

Williams AV  
10300 Valley View Rd  
Eden Prairie, MN 55344  
Ph: 800-328-6190 / 952-943-2252  
FAX: 952-943-2174  
Email: [info@williamsav.com](mailto:info@williamsav.com)  
Web: [www.williamsav.com](http://www.williamsav.com)

## **International Sales**

International Sales Department  
Williams AV  
10300 Valley View Rd  
Eden Prairie, MN 55344 USA  
Phone: +1 952 943 2252  
Fax: +1 952 943 2174  
Email: [info@williamsav.com](mailto:info@williamsav.com)  
Web: [www.williamsav.com](http://www.williamsav.com)

**WILLIAMS AV**  
[info@williamsav.com](mailto:info@williamsav.com) / [www.williamsav.com](http://www.williamsav.com)  
800-843-3544 / INTL: +1-952-943-2252