


2X2AMP-BT2S61SVC – Two Source, Amplified, 6.5”, Drop Ceiling Speaker with Bluetooth on a 2X2 Tile – One Speaker Package with Volume Control

Two Source, 6.5” Amplified Drop Ceiling Speaker with Bluetooth on a 2X2 tile and backcan assembly delivers up to 40 watts power directly to the speaker. Each powered speaker ([2X2AMP-BT2S61](#)) can drive three additional speakers ([2X2IC6NA](#)). One line can drive up to 10 self-amplified speakers. Lower noise feature and protection from shorts and overheating. 15 Volt DC Level 5 [power supply](#) and [Volume Control](#) included. Available also in models without Bluetooth features.

One Speaker assembly consisting of the following;

- 1) One (1) each ([2X2AMP-BT2S61](#)) 6.5” amplified speaker with one (1) each [Backcan](#) enclosure and one (1) each 2X2 tile assembled.
- 2) One (1) each UL Listed, Level 5, 15 VDC power supply ([PS15VDC35AL5](#))
- 3) One (1) each Stereo/Mono Volume Control ([AMPSTVCW](#))

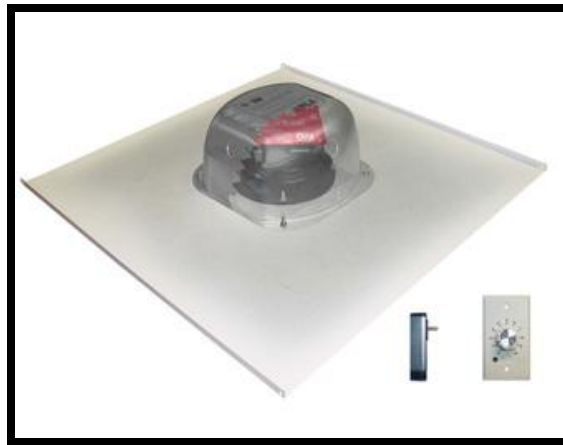

Features:

- Built onto the OWI [IC6](#) In-Ceiling Speakers on a 2X2 Tile and backcan assembly
- 2 Line Level Input/Sources
- Up to 40 Watts of Power – right at the speaker
- With Priority Override Features
- Balanced Line Level Output
- Bluetooth Features
- With a 3.5 mm Stereo Jack Line Input
- 15 Volt DC [power supply](#) (UL Listed-Level 5) included
- Protected from shorts and overheating
- Lower Noise Feature
- Fast and easy – install in the field
- [Stereo/mono volume controls](#) included
- Available in 1, 2 and 4 speaker packages

Available in the following complete install packages:

- | | |
|----------------------------------|--|
| 2X2AMP-BT2S61 | - One Speaker Package |
| 2X2AMP-BT2S62 | - Two Speaker Package |
| 2X2AMP-BT2S62SVC | - Two Speaker Package with Volume Control |
| 2X2AMP-BT2S64 | - Four Speaker Package |
| 2X2AMP-BT2S64SVC | - Four Speaker Package with Volume Control |

