

ADX10 LAVALIER CONDENSER MICROPHONE

OVERVIEW:

The ADX10 is a miniaturized condenser microphone designed for lavalier applications such as speech, presentation and theatrical production. Known for its clarity, resistance to feedback and ease of operation, the ADX10 has the ability to accurately capture and reproduce vocals from a comfortable distance of 4"-8".

The ADX10 is characterized with a uniformly controlled cardioid polar pattern, helping to isolate the area or section being miked from other vocals or instruments on stage. With a smooth and accurate frequency range of 50 Hz - 18 kHz, the ADX10 is lightweight, low profile and will provide natural sound with exceptional transient response.

The ADX10, primarily for use with the Audix RAD360 wireless system, includes a tie-clip, 3' attached cable terminating to a mini-XLRf connector. The wired version (ADX10P) includes an 8' cable terminating to a mini-XLRf connector, tie clip, external windscreen and a phantom power adapter module (APS910). The ADX10P, for wired use, includes a tie clip, an 8' cable terminating to a mini XLR-f connector and a phantom power adapter (APS910).

Manufactured to high standards and tight tolerances, the ADX10 features a modular threaded capsule, a machined brass body with matte black finish, high quality shielded microphone cable and a variety of optional accessories.

SUPPLIED ACCESSORIES:

- Tie clip (MC10L)
- External foam windscreen (WS10)
- Carrying pouch (P1)

OPTIONAL ACCESSORIES:

- WS10S - Snap to fit external windscreen
- MC10L - Metal clip with tension fit wire loop
- APS910 - Phantom power adapter
- APS911 - Battery / Phantom power adapter with on off switch and bass roll-off

MODEL VARIATIONS:

- ADX10P - Same as above with APS910 for hard wired use
- ADX10FLP - Same as above with flute clip (MCFLUTE) to replace tie clip



FEATURES:

- Small, lightweight, low profile
- Natural, accurate sound reproduction
- Easy to use and set up
- Field replaceable capsule
- Available for wireless and wired applications

APPLICATIONS:

- Speech
- Flute
- Acoustic instruments and hand drums



WS10S



MC10L



APS911




APS910

SPECIFICATIONS:

Transducer Type	Pre-Polarized Condenser
Frequency Response	50 Hz - 18 kHz
Polar Pattern	Cardioid
Output Impedance	800 Ohms balanced
Sensitivity	5 mV / Pa @ 1k
Equivalent Noise Level	<29 dB (A-weighted)
Signal to Noise Ratio	>65 dB
Power Requirements	9 - 52 Volts phantom
Maximum SPL	≥120 dB
Cable/Connector	Shielded 3' terminating to a miniature 3 pin Female XLR connector
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 relative to pin 3
Housing/Finish	Brass / Black Finish
Weight	21 g / 0.74 ounces
Length	25 mm / .98 inches

FREQUENCY / POLARS:

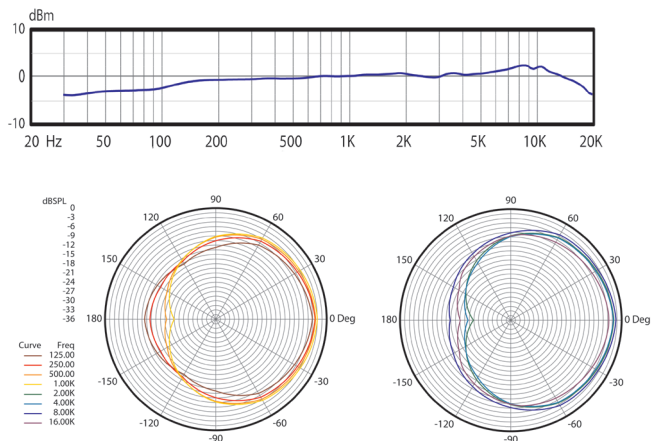

***All specifications subject to change without notice.

SERVICE AND WARRANTY:

This microphone is under warranty for a period of 3 years from any and all manufacturing defects. Should your microphone fail in any way, please contact the Audix Service department at 503-682-6933. A Return Authorization number is required before returning any products.

CARE AND MAINTENANCE:

The ADX10 is manufactured to exacting specs with roadworthy construction. However, the capsule is highly sensitive and should be handled with care. Avoid extreme temperatures and be sure to store your microphone in the pouch provided when not in use. Moisture of any kind can adversely affect the sound and performance of your microphone.

ARCHITECTS AND ENGINEERS SPECIFICATIONS:

The microphone shall be of the condenser type with a modular threaded capsule. The microphone shall be available in a cardioid polar pattern and shall have a 3' or 8' cable (depending on model) terminating in a mini-XLR female connector. The microphone shall have a sensitivity of 4.5 mV / Pa and a nominal impedance of 800 ohms at 1 kHz. The microphone shall have a maximum SPL level of ≥120 dB and shall be machined out of brass with a length of 25 mm and a capsule diameter of 10 mm. The microphone shall be the Audix ADX10.

OPERATION AND MAINTENANCE:

The ADX10 is designed to plug directly into the bodypack of the RAD360 wireless system. To use the ADX10 as a wired mic, you will need the version that includes phantom power supply (model ADX10P). For flute, you will need model ADX10FLP.

The ADX10 P and ADX10FLP are low impedance microphone and should be plugged into a "mic level" input on your console, mixer, or recording device. The ADX10P and ADX10FLP require phantom power and will NOT operate without phantom power voltage (minimum of 9 - 48 Volts) which is available on most professional mic preamps and mixing devices. If phantom power is not available on your equipment, use the Audix APS 911 which is an optional accessory that allows for battery operation. Avoid plugging or unplugging the microphone from a PA system unless the channel is muted or the volume of the system turned down. Failure to do so may result in a loud "popping" noise which could seriously damage the speakers in the PA system.

APS910 phantom power adapter: Note that the mini-XLRf connector at the end of the ADX10P and ADX10FLP plug into mini-XLRm side of the APS910 power adapter. From there, plug a standard XLR-XLR microphone cable to complete the connection from the APS910 to the mixing board.

USER TIPS:

Lavalier: The ADX10 can be attached to a tie, a lapel, or to fabric by mean of the the supplied alligator style clip. For best results, the microphone should be positioned so that the capsule of the microphone is in an upward position and 4-6 inches from the mouth. Be sure that the round ports on the microphone capsule always remain exposed and do not get covered up in any way by clothing.


It is recommended to use the supplied external windscreen to help reduce popping and breath noise.

Flute (Model ADX10FLP): With the "crown" detached, simply place the "O-ring" portion of the ADX10FLP mic clip at the end of the "head join" (as illustrated) and reattach the crown to the head joint.

Acoustic instruments: For violin, the ADX10 may be attached to the collar of a shirt pointing out towards the body of the instrument. For guitar, the ADX10 may be placed beneath the strings (with tape or velcro) or inside the guitar as an internal microphone. For udu drums, the ADX10 will fit inside the hole of the drum and held in place with the clay provided.



DIMENSIONS (mm):

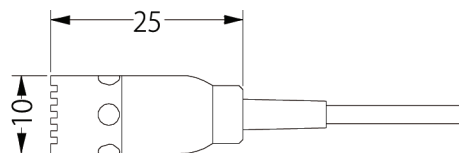

www.audixusa.com
503-682-6933 Fax: 503-682-7114
Audix Corporation 9400 SW Barber St. Wilsonville, OR 97070



AUDIX WARRANTY REGISTRATION FORM

Name: _____ Model: _____
 Company: _____ Serial Number: _____
 Address: _____ Store: _____
 City: _____ Store Location: _____
 Prov./State: _____ Zip: _____ Purchase Date: _____
 Phone: () _____ Signature: _____
 Email: _____ Date: _____

Please Check all that apply:

Male Female

Age:

- 18 or Under
- 19-25
- 26-35
- 36-45
- 46-55
- 55 +

Occupation:

- Musician
- Producer
- Sound Eng.
- Radio/TV
- Production
- Other _____

Primary Instruments:

- Vocal
- Guitar / Bass
- Drums
- Keyboard
- Brass
- Woodwinds
- Strings
- Other _____

Product to be used for:

- Pro live sound
- Pro recording
- Home recording
- Rehearsal
- Installation
- School
- House of Worship
- Other _____

How did you hear about Audix?

- Magazine Ad
- On-line Store
- Salesman
- Online Ad
- Friend
- Other _____

Do you own other Audix Products? Yes No

Model(s) _____

Have you visited the Audix website? Yes No

Please register your product online at www.audixusa.com or mail this form to:
 Audix Microphones P.O. Box 4010 Wilsonville, OR 97070