

 **Bluetooth**

Liberty Platinum

Sound System

- True AC/DC or AC Only
- 110/220V Power Supply
- Reaches Crowds of 1500+
- Up to Two Optional Built-in Wireless Receivers
- Comes with Standard Built-in Bluetooth
- Two Universal Microphone Input Jacks
- Bass and Treble Controls
- Optional Built-in CD/MP3 Combo Player
- 5V USB Charging Port

**COMES WITH
BUILT-IN
BLUETOOTH**



SIX YEAR WARRANTY



MADE IN THE USA

AnchorAudio.com • 800.262.4671

Liberty Platinum Sound System

Technical Specifications



SIX YEAR WARRANTY



Features

Reach Crowds of 1,500+

AC Mode = 125W / DC Mode = 100W

Optional Single or Dual Built-in UHF Wireless with 16 User Selectable Channels

Optional Built-In CD/MP3 Combo Player

Remote Control for CD/MP3 Combo Player

3.5mm input for iPod®

Comes with Standard Built-in Bluetooth

USB Port for Charging MP3 Player/iPod

Two Universal Microphone Input Jacks

Recessed Back Panel Protects Knobs and Ports

True AC/DC or AC only - 110/220V Power Supply

Ceramic Compression Driver

10" Woofer

Proprietary Class D Amplifier


User Replaceable Battery

Charging LED Bar Indicator

Operates 6-8 hours on a Single Charge

Speaker Out to Power Companion Speaker

AC Only Also Available

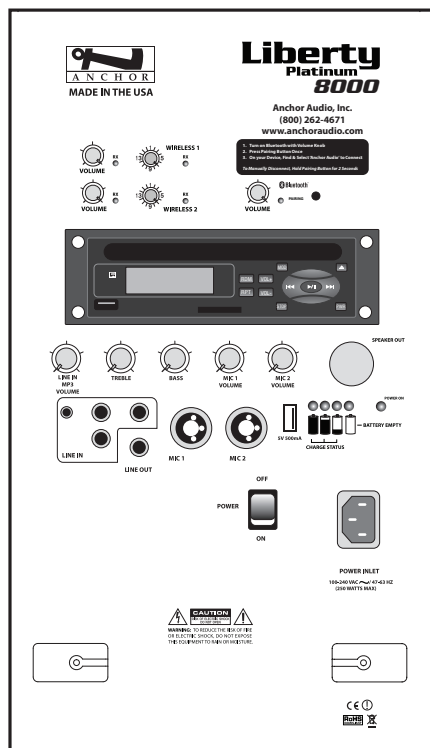

(LIB-8000CU2 Back Panel Shown)

LIBERTY MODELS AC/DC

LIB-8000	Liberty with Bluetooth
LIB-8000U1	Liberty with Bluetooth & 1 wireless receiver
LIB-8000U2	Liberty with Bluetooth & 2 wireless receivers
LIB-8000C	Liberty with Bluetooth & CD/MP3 combo player
LIB-8000CU1	Liberty with Bluetooth, CD/MP3 combo player & 1 wireless receiver
LIB-8000CU2	Liberty with Bluetooth, CD/MP3 combo player & 2 wireless receivers
LIB-8001	Unpowered companion speaker

UHF WIRELESS

WH-8000	Wireless handheld microphone/transmitter (540-570 MHz)
WB-8000	Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

TECHNICAL SPECIFICATIONS

Rated Power Output	125 watts AC / 100 watts DC	Mic Inputs:	Lo-Z (1 K Ω), balanced, XLR
Max SPL @ Rated Power	117 dB		12 VDC condenser mic (phantom) power
Battery	Two 12 V, lead acid rechargeable, 9.0 AH Full recharge: approx 7 hrs		Hi-Z (10 K Ω), unbalanced, 1/4" phone
Frequency Response	60 Hz - 15 kHz $\pm$ 3dB		Hi-Z (10 K Ω), unbalanced, 1/8" stereo
Line Output (post fader)	isolated, 600 Ω , 1/4" phone	Line In	unbalanced, stereo RCA
AC Power Reqs.	100 - 240 VAC, 50/60 Hz, 300W max	Sensitivity For Rated Output	
USB	5V 500mA	Lo-Z Microphone	-52 dBV (2.5 mVrms)
Dimensions (HWD)	22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)	Hi-Z Microphone	-43 dBV (7.5 mVrms)
Weight (AC/DC)	38 lbs / 17 Kg	Auxiliary (line)	-14 dBV (200 mVrms)
Weight (AC only)	26 lbs / 12 Kg	Phantom Power	36V
		Speaker Out	4-pole Neutrik Speakon® jack



(Features & Specifications Subject to Change Without Notice)