

DR-900 & RP-900 INSTRUCTION MANUAL

59010-029-05



DR-900 Dual Rack Adaptor



RP-900 Front Panel

Use Instruction:

1. Before mounting receiver onto DR-900 rack adaptor, please release any cables from the rear of the receiver.
2. Turn over receiver to the back and DR-900 rack adaptor simultaneously, there are 4 threaded holes each in the bottom of receiver and rack adaptor for inserting screws. (Figure 1)
3. Insert the receiver through the front of the DR-900 rack adaptor. (Figure 1)
4. Push receiver into place until holes on receiver aim at holes on DR-900 one by one, then screw the receiver tightly with the adaptor. (Figure 2)
5. As long as follow steps 1 to 3, then a second receiver is able to be mounted onto the other side of rack adaptor.
6. When only one receiver is installed, screw the attaching front panel (RP-900) on the other side of rack adaptor. (Figure 3)

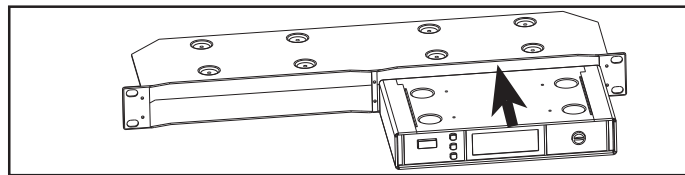


Figure 1

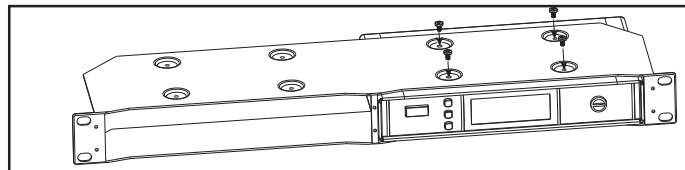


Figure 2

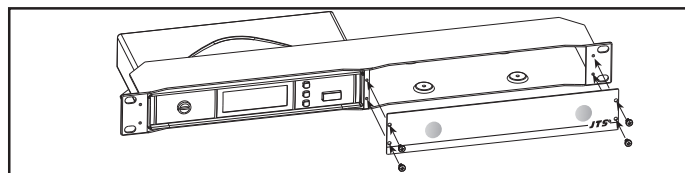


Figure 3


Accessories:

Front Panel: 1pcs(RP-900)

M3 Screws: 8pcs

Plastic Hole Plugs: 2pcs

Dimension:

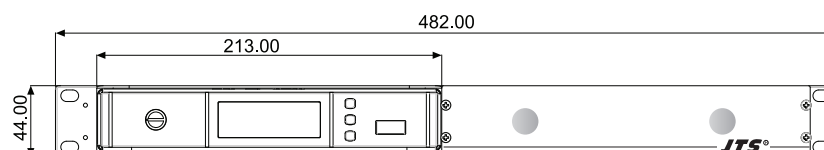

JTS® PROFESSIONAL CO., LTD.
No. 148, 9th Industry Road, Ta-Li Industrial Park,
Taichung City, Taiwan, R.O.C.
Tel: 886-4-24938803 Fax: 886-4-24914890
E-mail: jts@jts.com.tw
www.jts.com.tw

JTS®