

IPX Connector Block Pin Configuration



Applicable to All AtlasIED IPX Speaker Models Starting with "IP"

A 14 pin screw type connector block (J2) will be used to allow connections to the controller.

Pin Description

- 1 GPI In-2 +
- 2 GPI In-2 GND
- 3 GPI In-1 +
- 4 GPI In-1 GND
- 5 Relay
- 6 Relay Common
- 7 Line-In (+)
- 8 Line-In (-)
- 9 Line-Out (+)
- 10 Line-Out (-)
- 11 Primary / Right Speaker (+)
- 12 Primary / Right Speaker (-)
- 13 Secondary / Left Speaker (+)
- 14 Secondary / Left Speaker (-)

Note: Pin 14 is located next to the RJ45 jack.

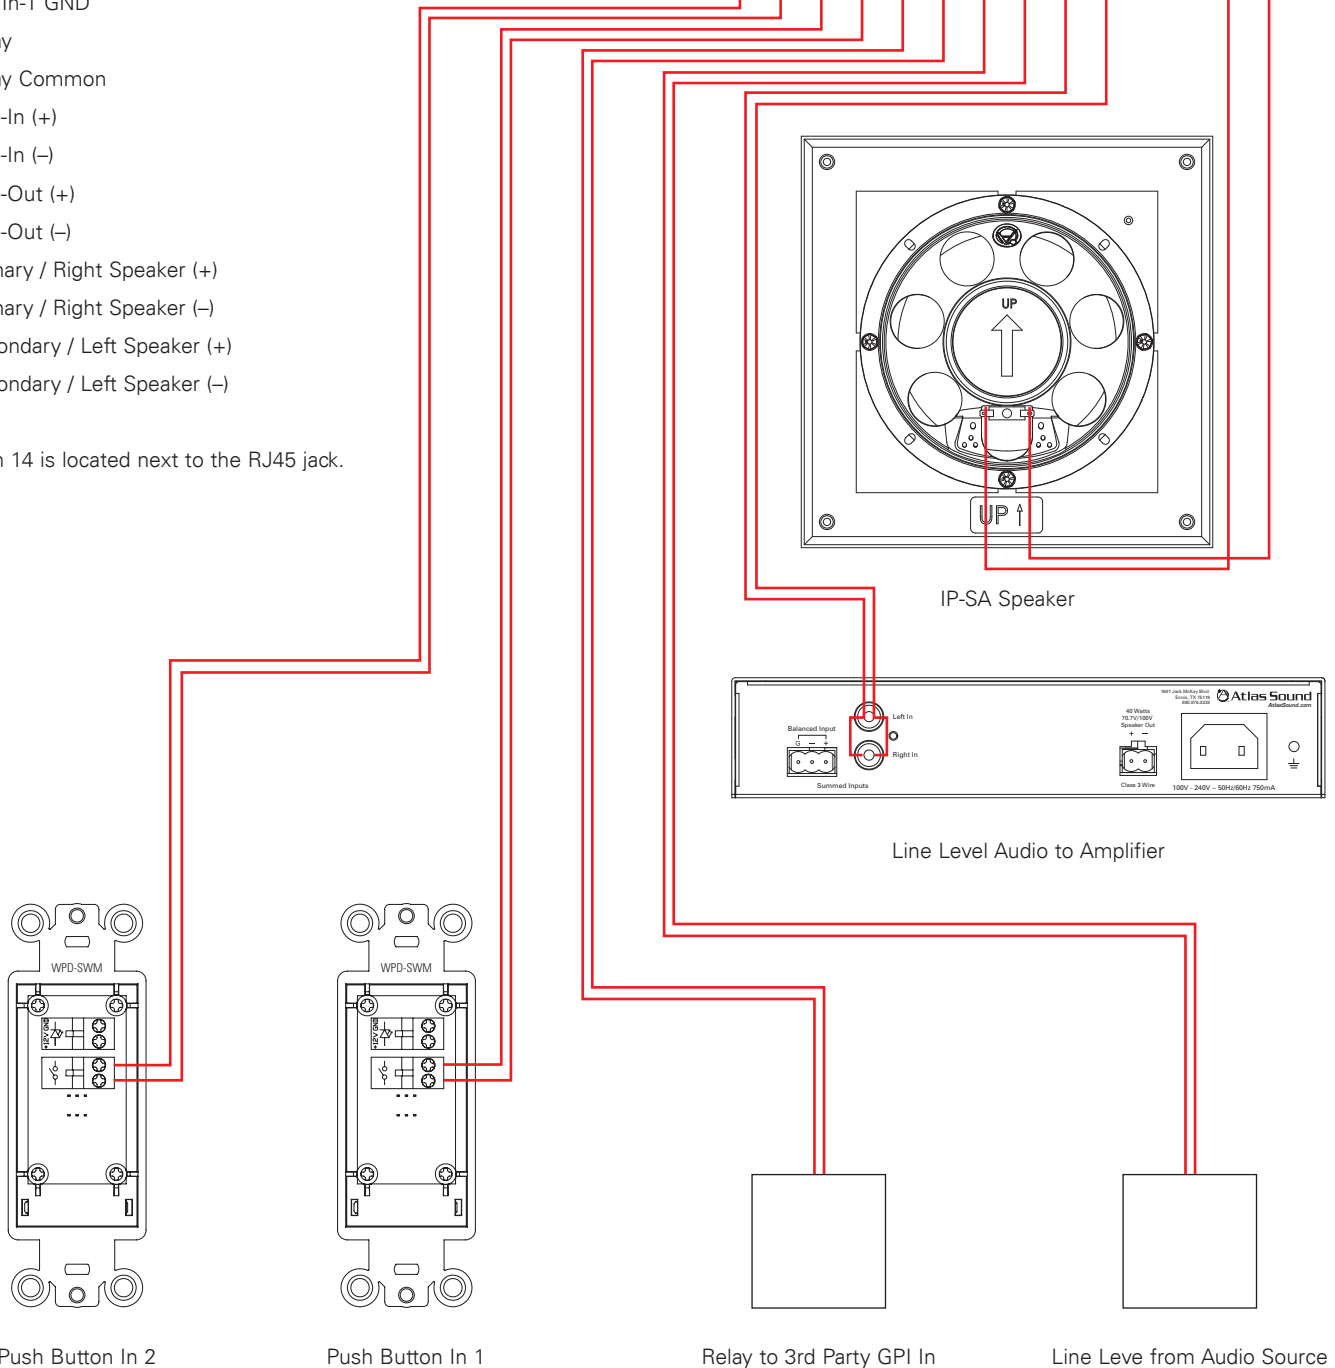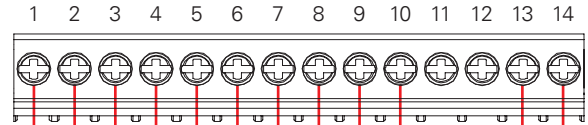

©2019 Atlas Sound LP. The Atlas "Circle A", Soundlier, and Atlas Sound are trademarks of Atlas Sound L.P. IED is a Registered Trademark of Innovative Electronic Designs LLC. All rights reserved. All other Trademarks are property of their respective owners. No endorsement is implied. Due to continual product development, specifications are subject to change without notice. ATSO05300 RevB 1/19