

PD6


Pure Resonance Audio PD6 6.5" 2-Way Open-Ceiling Pendant Mount Loudspeaker - Black

DESCRIPTION:

Designed to meet the needs of indoor and outdoor open-ceiling commercial applications, the Pure Resonance Audio PD6 6.5" full-range pendant speaker is weather-resistant, high powered and easy to install. This 70-volt pendant mount loudspeaker is perfect for restaurants, retail stores, offices, warehouses, or any other open-architecture high ceiling environment where paging, announcements or foreground and background music is required.

FEATURES:

- Durable weather-resistant construction for indoor and outdoor use
- 70 Volt/100 Volt transformer with 8 Ohm bypass
- 6.5" Polypropylene woofer and 1" silk tweeter
- 87 dB sensitivity provides quality sound
- Easy and secure installation with included pendant mounting hardware
- Euroblock screw terminal connector
- Available in black (PD6) and white (PD6W)

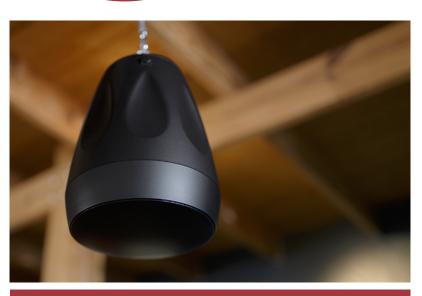

DDANIICT CDECIEICATIONS

PRODUCT SPECIFICATIONS:	
Power Rating	30 Watts RMS; 70 Watts Peak
Frequency Response (±10 dB)	65 Hz – 20 kHz
Sensitivity	87 dB 1m/1w
Max Sensitivity	101 dB
Dispersion	Conical 150°
Impedance	8 Ohms
Transformer Taps (70V)	4W / 8W / 16W / 32W / 8 Ohm Bypass
Woofer	6.5" Polypropylene
Tweeter	1" Silk
Grill	Powder-coated aluminum
Connection	4-pin Euroblock screw terminal
Dimensions (H x Dia)	10.3" (285 mm) x 8.1" (207 mm)
Weight	6.35 lbs (2.88 kg)
Shipping Dimensions (H x W x D)	11.25" x 13.5" x 10.56"
Shipping Weight	9 lbs (4.08 kg)

PURE RESONANCE AUDIO®