


ZLX-15P-G2 15" 2-way powered speaker

- ZLX-G2 is the next generation of the best-selling pro-audio loudspeaker series from Electro-Voice
- Increased maximum SPL output and extended frequency response
- Robust and ergonomic design for day-to-day durability and portability
- Advanced connectivity with Bluetooth® wireless stereo streaming and QuickSmart Mobile app control
- **POWERED BY DYNACORD** - built in digital mixer with FX, AFS, ducker, PEQ and more

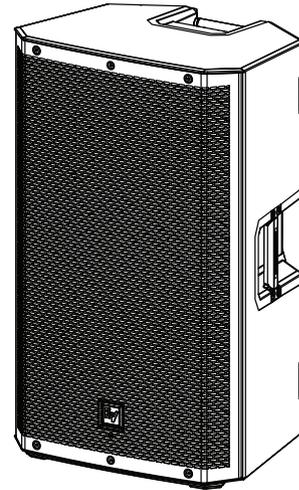

The new ZLX-G2 professional audio loudspeaker series is the next generation of the best-selling speakers from Electro-Voice, which raises the standard for performance and features in its class.

The ZLX-G2 series is offered in 15-inch, 12-inch, and new 8-inch woofer sizes, both powered and passive variants.

ZLX-G2 loudspeakers lead with acoustic output and extended frequency range. The Electro-Voice-patented Signal Synchronized Transducers (SST) baffle design ensures enhanced bass response, smaller size and more even coverage across all frequencies.

ZLX-G2 is designed with a robust and ergonomic enclosure for day-to-day durability and portability.

POWERED BY DYNACORD, all powered ZLX-G2 loudspeakers feature a built-in digital mixer with FX, EQ, automatic feedback suppression (AFS) and ducking. The mixer includes two XLR/TRS combo jacks, and provides 24V phantom power and Hi-Z compatibility.

Bluetooth® stereo streaming and linking for true wireless stereo setup are integrated into the ZLX-G2 series. The mixer and all speaker functions are easily controlled from the Electro-Voice QuickSmart Mobile app. The app allows pairing and grouping of up to six loudspeakers, in any combination.

The new larger full-color LCD display and simple single encoder and push-key interface result in quick setup and more user control. Powered ZLX-G2 loudspeakers contain Electro-Voice-specific subwoofer presets that adjust for both gain and time alignment,

resulting in full acoustic optimization. Additional high-pass filters (HPF) are available in the DSP for increased compatibility.

ZLX-G2 series accessories such as padded covers, a U-bracket for mounting 12- and 15-inch models, and universal wall-mount brackets compatible with all models are available.


Technical specifications

| | |
|---|---|
| Frequency response (-3 dB) (Hz) ¹ | 48 Hz – 18,000 Hz |
| Frequency range (-10 dB) (Hz) ^{1,2} | 42 Hz – 20,000 Hz |
| Maximum sound pressure level at a distance of 1 m (dB) ³ | 129 dB |
| Coverage angle HxV (°) | 90° x 60° |
| Crossover frequency (kHz) | 1.40 kHz |
| Power rating (W) | 1000 W |
| Power consumption (V, Hz) ⁴ | 100 - 240 V~, 50 - 60 Hz |
| LF transducer | WECA2158 |
| LF transducer size (in) | 15 in |
| LF transducer magnet material | Ferrite |
| HF transducer | DECA2516 |
| HF transducer type | Compression driver |
| HF transducer size (in) | 1.40 in |
| HF transducer magnet material | Ferrite |
| HF transducer diaphragm material | Titanium |
| Connector type | (2) XLR/TRS combo, (1) 1/4-inch TS Hi-Z |


| | |
|--------------------------------------|--------------------------------|
| Material | Polypropylene |
| Grille material | Powder coated steel |
| Dimensions (H x W x D) (mm) | 697.6 mm x 422.8 mm x 383.1 mm |
| Dimensions (H x W x D) (in) | 27.46 in x 16.65 in x 15.08 in |
| Shipping dimensions (H x W x D) (mm) | 765 mm x 490 mm x 490 mm |
| Shipping dimensions (H x W x D) (in) | 30.12 in x 19.29 in x 19.29 in |
| Weight (kg) | 16.78 kg |
| Weight (lb) | 37 lb |
| Shipping weight (kg) | 19.64 kg |
| Shipping weight (lb) | 43.30 lb |

- 1) Full space measurement using music DSP preset.
- 2) Half-space measurement.
- 3) Maximum SPL is measured at 1 m using broadband pink noise at maximum output.
- 4) Current rating is 1/8 power.

Frequency response:

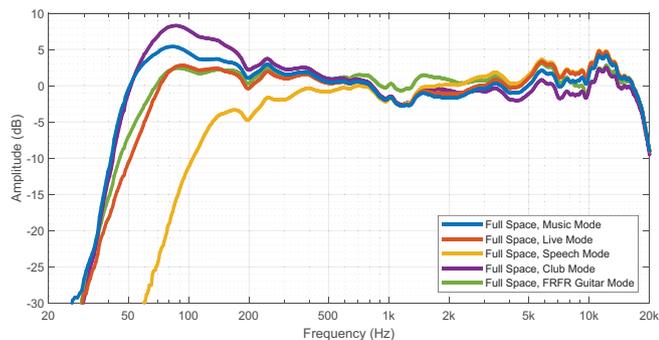

Dimensions:

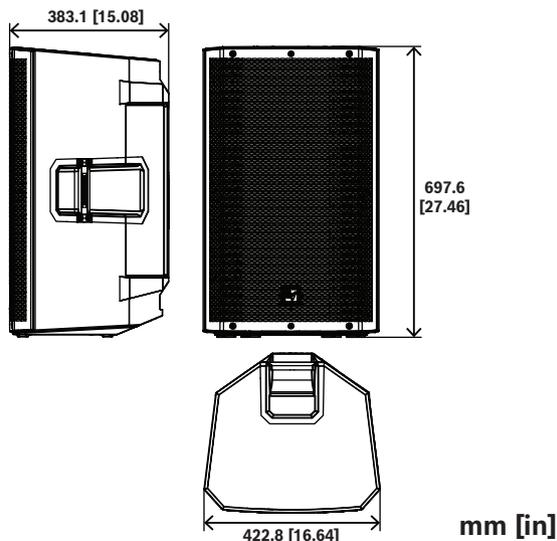

Represented by:

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany
 www.electrovoice.com

Bosch Security Systems, LLC
 12000 Portland Avenue South
 Burnsville MN 55337
 USA

Ordering information

ZLX-15P-G2-EU 15" 2-way powered speaker, EU cord
 Powered 15-inch 2-way loudspeaker, EU cord, black
 Order number **ZLX-15P-G2-EU | F.01U.385.529**

ZLX-15P-G2-US 15" 2-way powered speaker, US cord
 Powered 15-inch 2-way loudspeaker, US cord, black
 Order number **ZLX-15P-G2-US | F.01U.385.526**

Accessories

ZLX-15-G2-CVR Padded cover for 15" ZLX-G2 models
 Padded cover for 15-inch ZLX-G2 loudspeaker models, EV logo, black
 Order number **ZLX-15-G2-CVR | F.01U.385.535**

ZLX-G2-BRKT Wall mount bracket, ZLX G2 2-way mode
 Wall mount bracket for 12-inch and 15-inch ZLX-G2 loudspeakers, black
 Order number **ZLX-G2-BRKT | F.01U.398.947**

BRKT-POLE-L Wall mount bracket 12", 15" 2-way speaker
 Pole mount bracket for loudspeakers up to 15 inches, black
 Order number **BRKT-POLE-L | F.01U.385.537**