

KEY FEATURES

- AEC, Noise canceller for noise free, intelligible conversations
- Speech Quality is up-to 7kHz Audio
- 2M pixel C-MOS Camera built-in
- H.263, H.264 for Video Codec, and G.711a/μ, G.722, G.729 for Audio Codec
- PoE (IEEE802.3af, Power Over Ethernet) is supported
- Supported network protocols are HTTP, HTTPS, FTP, DNS, NTP, RTSP, RTP, ICMP, DHCP, ARP
- Supported Network Security are SIP over TLS, HTTPS, SRTP (encryption of streaming)
- Unlimited number of stations are available in one system by using Peer-to-peer mode
- Address book can store up to 3000 names
- System configuration, control and monitoring via web browser


SPECIFICATION

Phone Features	Web support multi-language Auto-answer Volume control Direct IP call without SIP proxy Auto-Provision DTMF modes: Inband, RFC2833, SIP INFO Audio Features: VAD, CNG, AEC, G.165/G.168
Network Features	2x10/100Mbps Ethernet Port 1xPoE(IEEE803.2af) Security: Password Protection, IP address filtering, SIP over TLS, HTTPS encryption, user access log Protocols support: IPv4, HTTP, HTTPS, FTP, DNS, NTP, RTSP, RTP, TCP, UDP, ICMP, DHCP, ARP IP assignment: Static IP, DHCP, PPPoE
SIP Features	SIP v1(RFC2543), SIP v2(RFC3261) Audio codecs: G.711a, G.711μ, G.722, G.723, G.729a/b, iLBC, AMR-NB/WB, OPUS Video codecs: H.263, H.264 Speech Quality: 7kHz Audio Echo Cancellation Voice Activation Detection Comfort Noise Generator
Others	Android 4.2 Management by LCD Menu Configuration, WebUI Download content from the specified server Information receiving, storing, and rendering capabilities Web browser Contacts and Call records management Support playing local or online video


SPECIFICATION

Graphic Display	7 inch capacitive touch screen TFT LCD, 800x480 pixels , 16:9 wide screen aspect ratio
Camera	2M pixels C-MOS camera, free rotation
Resolution	up to 1080p
Video Features	QCIF, QVGA, CIF, 4CIF, VGA Video bitrate: 64kbps~2Mbps PIP Full Screen local video ON/OFF control
Hands-Free	Microphone and Speaker built-in
Hand-set	Connected with a carl-cord
External Interface	IEEE802.11 b/g/n, USB 2.0, 3.5mm headset jack, HDMI
Power Source	DC 12V by AC adaptor, PoE
Power Consumption	less than 12W
Installation	Desktop
Operating Temperature	0℃ ~ 40℃ (32°F - 104°F)
Finish	ABS
Dimension	240(H)x213(W)x120(D)mm (9.44" x 8.39" x 4.72")


APPEARANCE

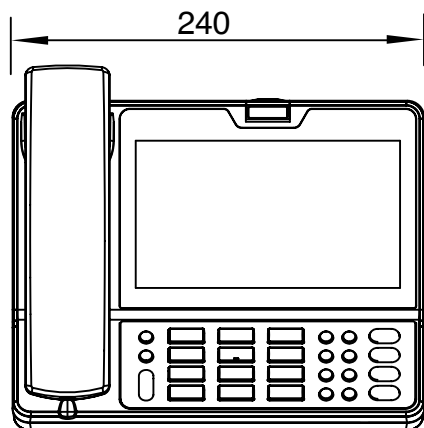


[Front]

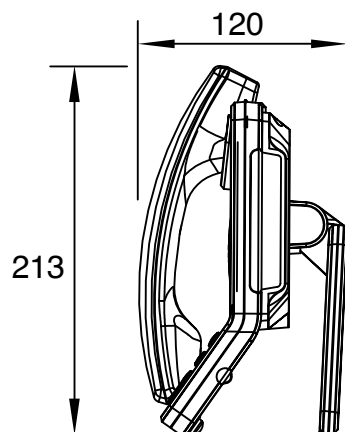

[Side 1]

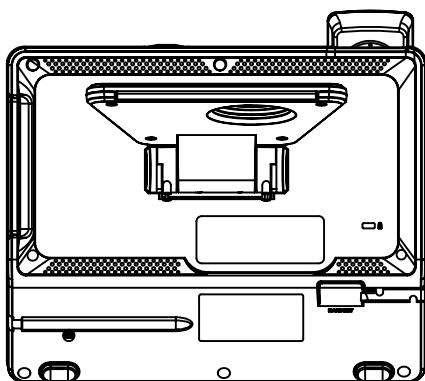

[rear]

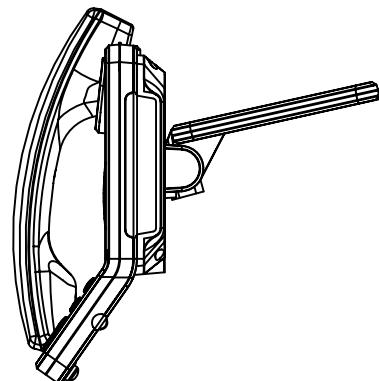

[Side 2]

Unit: mm