

AN-130+ Speaker Monitor





The Anchor Audio AN-130+ monitor speaker is a light-weight, easy to use system that fills the room with your voice. With the wireless microphone you're free to move around the room. The AN-130+ is ideal for use with a video projector, PC or CD/DVD player. Who uses the AN-130+? Teachers, corporate presenters, anyone that needs to reach groups of 1 to 150+.

Technical Specifications

Features

Reach Crowds Of 150+

103 dB of Clear Sound

16 Channel UHF Diversity Wireless Option by Anchor Audio

Bass & Treble Controls

30 Watt Amplifier Equals Lots of Sound

Input Jacks: 1/4" & 3.5mm Line In , 1/4" Mic In

1/4" Line-Out Jack - Daisy Chain Multiple Systems Or Record Output

4.5" Woofer and 10mm Dome Tweeter

Remote Control for Volume and Mute Available

Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)

AN-130+ MODELS

AN-130+ AN-130+ white AN-130BK+ AN-130+ black

AN-130F1 + AN-130+ with 1 built-in wireless receiver - white AN-130F1BK+ AN-130+ with 1 built-in wireless receiver - black

AN-130F1RC+ AN-130+ with 1 built-in wireless receiver

& remote control - white

AN-130F1RCBK+ AN-130+ with 1 built-in wireless receiver

& remote control - black

AN-130RC+ AN-130+ with remote control - white
AN-130RCBK+ AN-130+ with remote control - black

ACCESSORIES

REMOTE-130 Infrared remote control

(AN-130RC+ only)

MIC-90P Professional dynamic, cardioid

pattern

handheld microphone

HC-ARMOR24-AN Anchor Armor hard case -

Two AN speaker monitors

SS-250 Speaker stand SB-1BK Stand mount

SB-3W/SB-3BK 40° Tilt ceiling mount bracket*
SB-360W/SB-360BK 360° swivel wall bracket*

UHF WIRELESS

WH-8000 Wireless handheld microphone/transmitter


(540-570 MHz)

WB-8000 Wireless body-pack transmitter (540-570 MHz) (requires handsfree

microphone) Microphone options include:

Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60,

Headband/HBM-TA4F

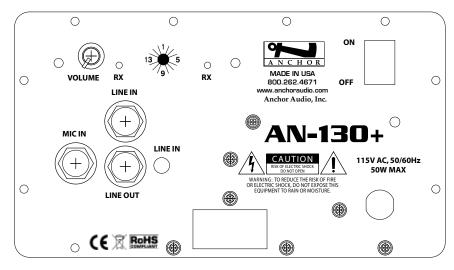

(AN-130F1+ Control Panel Shown)

TECHNICAL SPECIFICATIONS

 Rated Power Output
 30 watts

 Max SPL @ Rated Power
 103 dB @ 1 meter

 Frequency Response
 65 Hz − 18 kHz ± 3 dB

 Speaker Type
 4.5" woofer, 10 mm dome tweeter

 AC Power Reqs.
 110 − 125 VAC, 50/60 Hz

 Export Model
 208 − 240 VAC, 50/60 Hz (50W max)

 Fuse Rating
 T 1.0A / 250V

Export Model T 0.5A / 250V (internally mounted)
Dimensions (HWD) 5.25" x 8.4" x 9" (13 x 21 x 23 cm)

Weight 6 lbs / 2.8 Kg

Inputs
Line (2) Hi-Z, unbalanced
Microphone Lo-Z, unbalanced, 1/4" phone

Output
Line Lo-Z, buffered, 1/4" phone & 3.5mm phone

Sensitivity For Rated Output

 Line
 -20 dBV (100 mVrms)

 Microphone
 -43 dBV (7.5 mVrms)



(Features & Specifications Subject To Change Without Notice)

Anchor Audio, Inc.

www.anchoraudio.com