

AN-130+ Speaker Monitor

MADE IN USA



SIX YEAR WARRANTY



The Anchor Audio AN-130+ monitor speaker is a light-weight, easy to use system that fills the room with your voice. With the wireless microphone you're free to move around the room. The AN-130+ is ideal for use with a video projector, PC or CD/DVD player. Who uses the AN-130+? Teachers, corporate presenters, anyone that needs to reach groups of 1 to 150+.

Technical Specifications

Features

- Reach Crowds Of 150+
- 103 dB of Clear Sound
- 16 Channel UHF Diversity Wireless Option by Anchor Audio
- Bass & Treble Controls
- 30 Watt Amplifier Equals Lots of Sound
- Input Jacks: 1/4" & 3.5mm Line In, 1/4" Mic In
- 1/4" Line-Out Jack - Daisy Chain Multiple Systems Or Record Output
- 4.5" Woofer and 10mm Dome Tweeter
- Remote Control for Volume and Mute Available
- Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)

AN-130+ MODELS


AN-130+	AN-130+ white
AN-130BK+	AN-130+ black
AN-130F1+	AN-130+ with 1 built-in wireless receiver - white
AN-130F1BK+	AN-130+ with 1 built-in wireless receiver - black
AN-130F1RC+	AN-130+ with 1 built-in wireless receiver & remote control - white
AN-130F1RCBK+	AN-130+ with 1 built-in wireless receiver & remote control - black
AN-130RC+	AN-130+ with remote control - white
AN-130RCBK+	AN-130+ with remote control - black

ACCESSORIES

REMOTE-130	Infrared remote control (AN-130RC+ only)
MIC-90P	Professional dynamic, cardioid pattern handheld microphone
HC-ARMOR24-AN	Anchor Armor hard case - Two AN speaker monitors
SS-250	Speaker stand
SB-1BK	Stand mount
SB-3W/SB-3BK	40° Tilt ceiling mount bracket*
SB-360W/SB-360BK	360° swivel wall bracket*

UHF WIRELESS

- WH-8000 Wireless handheld microphone/transmitter (540-570 MHz)
- WB-8000 Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

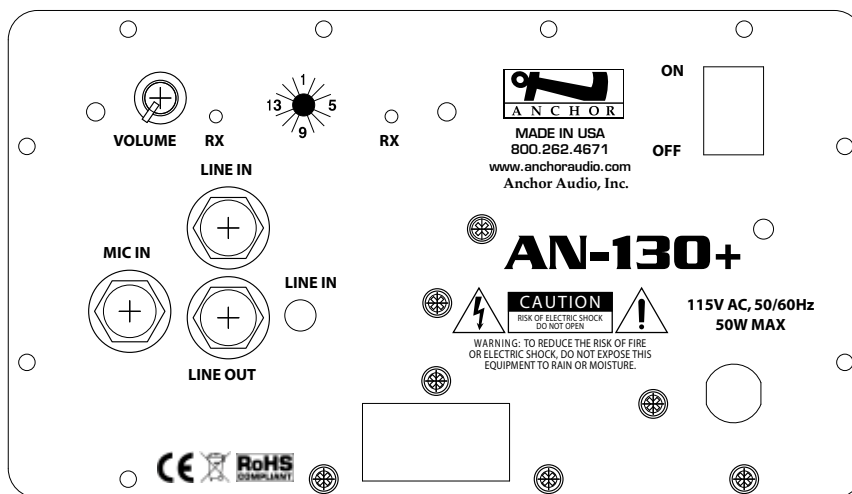

(AN-130F1+ Control Panel Shown)

TECHNICAL SPECIFICATIONS

Rated Power Output	30 watts
Max SPL @ Rated Power	103 dB @ 1 meter
Frequency Response	65 Hz - 18 kHz \pm 3 dB
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Reqs.	110 - 125 VAC, 50/60 Hz
Export Model	208 - 240 VAC, 50/60 Hz (50W max)
Fuse Rating	T 1.0A / 250V
Export Model	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	5.25" x 8.4" x 9" (13 x 21 x 23 cm)
Weight	6 lbs / 2.8 Kg

Inputs	
Line (2)	Hi-Z, unbalanced
Microphone	Lo-Z, unbalanced, 1/4" phone
Output	
Line	Lo-Z, buffered, 1/4" phone & 3.5mm phone
Sensitivity For Rated Output	
Line	-20 dBV (100 mVrms)
Microphone	-43 dBV (7.5 mVrms)



(Features & Specifications Subject To Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com