



AcousticDesign™ Series AD-C4T-LP

Small format, low profile,
ceiling mount loudspeaker

Features

- Consistent tonal characteristics across the entire AcousticDesign family in both surface or ceiling applications
- DMT (Directivity Matched Transition™) waveguide ensures smooth, uniform frequency response over the coverage area
- Snap-fit magnetic grille
- 3x double stepped, long travel dog-ear blind mount system
- Intrinsic Correction™ voicings available via Q-SYS networked audio processing platforms, including CXD amplifiers
- Low-saturation and low-loss 70/100V transformers with 16Ω bypass
- Blemish-free removable logo
- Removable conduit cover plate, also available as accessory for pre-install wiring
- UL1480 and UL2043 certified EN54-24 Type A (pending)
- Available in white (RAL 9010)
- Complete EASE, CF2, CAD, & BIM information available online

**Preliminary
Specifications**



**Restaurant · Retail · Audio Visual · Education · Concourses · Casinos ·
Transportation Terminals · Worship Facilities · Large System Ancillary Support**

The QSC AcousticDesign™ AD-C4T-LP is a 4.5" two-way low profile ceiling loudspeaker ideally suited for a wide variety of foreground and background sound reinforcement applications which utilize 70/100V or 16Ω bypass configurations.

The AcousticDesign™ series offers integrators a premium quality installed sound solution where performance, consistent coverage, and aesthetics are paramount. Specifically designed to maintain a consistent tonal characteristic across the entire family in both ceiling or surface applications, the AcousticDesign series allows integrators seamless transitions within blended installations.

The AD-C4T-LP features a high quality 4.5" weather treated paper cone woofer with a 1" voice coil and a 1" aluminum dome tweeter which is positioned on a DMT waveguide in front of the woofer. DMT (Directivity Matched Transition™), is QSC's design philosophy where the high frequency waveguide is matched to the natural conical behavior of the woofer at the crossover point. The result is a coherent transition between transducers with improved off-axis power response for consistent 150° conical DMT coverage.

The accurate frequency response of the AD-C4T-LP is maintained even in 70/100V applications by use of a low-loss, low-saturation 30-watt transformer with selectable taps, including 16Ω bypass, using a rotary selector located under the

snap-fit magnetically attached powder coat steel grille.

To retain lasting good looks, the rugged ABS baffle is further protected by using UV inhibitors that prevent discoloration and by a powder coated steel back can. The magnetic grille features a stick-on logo that can be removed blemish-free for installations where branding is not permitted.

Installers will appreciate the 3x double stepped, long travel dog-ear blind mounting system, which captures from 0" - 2.25" of ceiling thickness. A captured Phillips screw provides access to the removable conduit cover plate; also available as an accessory, as is a separate mud-ring for pre-install wiring. A locking 4-pole Euro-block connector that can accept four 18AWG pairs eliminates the termination hassles of star topology wiring designs.


Intrinsic Correction™ voicings that optimize performance and speed the install process are easily deployed via Q-SYS networked audio processing platforms, including CXD power amplifiers, as part of a complete QSC systems solution.

The AD-C4T-LP is available in QSC standard white (RAL 9010) and may be painted to match any decor.


For your system integration needs, complete EASE, CF2, CAD, and BIM files are available for download at QSC.com.

AD-C4T-LP Details


Impedance / Frequency Response:

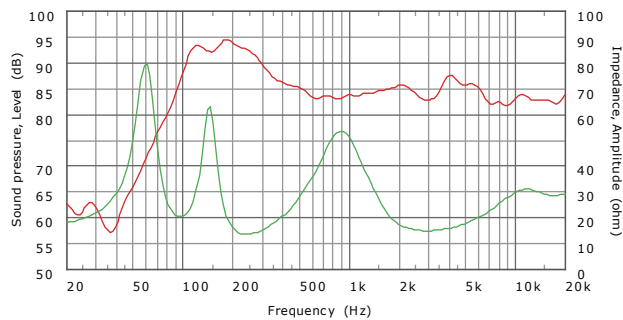

Contour:

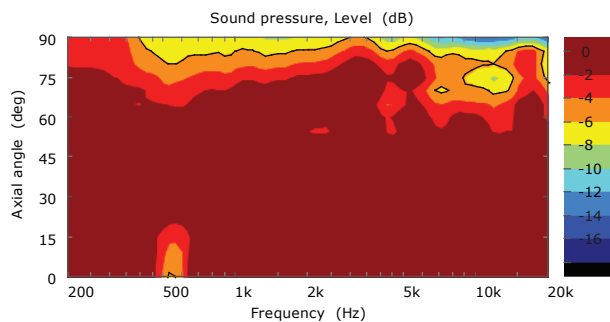

Dimensions:

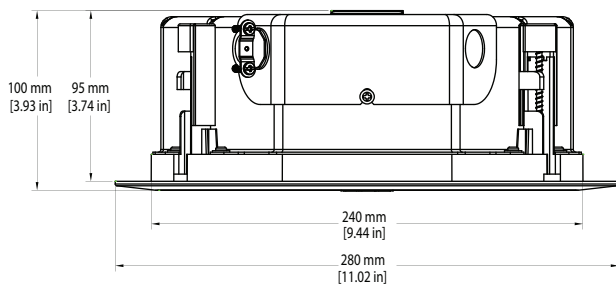

Specifications

System Details	AD-C4T-LP
Effective frequency range ¹	68 Hz – 20 kHz
Rated noise power / voltage ²	30 watts / 22 volts (rms)
Sensitivity [dB] ⁴	87
Sensitivity at 4m, 100V maximum tap (EN54)	TBD
Rated coverage (-6 dB) [°] ³	150° conical DMT
Coverage angle by frequency	500Hz 1000Hz 2000Hz 4000Hz
Conical coverage (EN54)	TBD° TBD° TBD° TBD°
One-third octave frequency band contribution at full power using 100V maximum tap [Hz / dB] (EN54)	500 / TBD; 630 / TBD; 800 / TBD 1000 / TBD; 1250 / TBD; 1600 / TBD 2000 / TBD; 2500 / TBD; 3150 / TBD; 4000 / TBD
Directivity factor	4.5
Directivity index [dB]	6.5
Maximum continuous SPL [dB] ⁵	102
Maximum peak SPL [dB] ⁵	108
Nominal impedance [ohms]	16
Recommended amplifier	60 watts
Transformer taps / impedance	16Ω (in bypass setting) 3.75W (70V); 7.5W (100V) Tap: 1333Ω 7.5W (70V); 15W (100V) Tap: 667Ω 15W (70V); 30W (100V) Tap: 333Ω 30W (70V); N/A (100V) Tap: 167Ω
LF transducer	114 mm [4.5 in] weather resistant paper cone woofer
HF transducer	25 mm [1 in] aluminum dome tweeter
Input connector type	Euroblock connector with parallel output
Enclosure material	ABS baffle on powder coated steel back can
Grille material	Powder coated steel
Ingress protection	TBD
Operating environment	Designed for indoor use
Operating temperature range	-20 to 50° C [-4 to 122° F]
Cutout dimension	Ø 245 mm [Ø 9.65 in]
Net weight	3 kg [6.6 lb]
Product dimensions (Diameter x Height)	Ø 280 x 100 mm [Ø 11.02 x 3.93 in.]
Shipping weight	10.2 kg [22.5 lb] (pair packed)
Shipping dimensions (H x W x D)	183 x 699 x 394mm [7.2 x 27.5 x 15.5 in](pair packed)
Included accessories	C-ring and tile rails, rail screws, euroblock connector, cut-out template, tether grille
Optional accessories	AD-MR6 (pre-install mud ring) AD-CC6 (pre-install conduit cover) AD-FC6 (full capture grille system)
Safety Agency	EN54-24: 2008 type A (No. pending) UL1480, UL2043, NFPA90, NFPA70 suitable for use in air handling spaces. Transformer UL registered per UL1876, ROHS, C-Tick X000, CE compliant. Baffle meets UL94-VO and UL94-5VB flammability rating; in accordance with IEC60849 / EN60849 systems.

As part of QSC's ongoing commitment to product development, specifications are subject to change without notice.

¹ IEC noise, 2hrs

² -10dB from rated sensitivity

³ 500 Hz-5 kHz average

⁴ Transformer bypassed, 1W, 1m, IEC baffle, 200-10kHz average, on-axis

⁵ Calculated from rated noise voltage and sensitivity

Preliminary Specifications

1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174

© 2016 QSC, LLC all rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark office and other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.

AD-C4T-LP Spec Sheet 04/12/2016



please recycle