

## Model

# RLB-KIT Series

- **Rackmount Light Bar Kit**
- **Rocker or proximity switch**

Magnetic-mount light bars are designed for rack interiors so integrators can work on installed equipment without the need of a flashlight. The light bars fit especially well in rear rack corners or rails, while the actuation switch (rocker or proximity) can be mounted virtually anywhere inside or outside the rack with the included hardware.

## Features

- Each kit features two (2) light bars with magnetic strips attached. The bars measure 5/8 in. x 5/8 in. x length of choice:
  - 16 in. long (273 lumens and 4.4W per bar, for vertical mount in racks 10U or taller or horizontal mount at top inside of rack)
  - 40 in. long (780 lumens and 12W per bar, for racks 24U or taller)
  - 60 in. long (1170 lumens and 18W per bar, for racks 35U or taller)
- Pure white light
- Power supply: 12VDC 3A (36W)
- Choose standard rocker switch or proximity switch.
- Includes mounting brackets, hardware, and double-faced tape pads for activation switch

Model RLB-KIT-60  
mounted in LER  
Series rack.



## A&E Specifications

The rack shall include light bar kit Lowell Model No. \_\_\_\_\_, which shall feature two light bars with magnetic strips to provide pure white light inside the rack. Each bar shall measure 5/8 in. x 5/8 in. x \_\_\_\_\_ (16 in., 40 in., 60 in.). The kit shall include a power supply and a \_\_\_\_\_ (rocker, proximity) switch with mounting hardware.

## Model Summary

Model No.	Description	Power (per bar)	Lumens (per bar)	Switch	Width	Depth	Length	For Min. Rack Ht.
RLB-KIT-16	Rack light bar kit	4.4W	273	Rocker	5/8 in.	5/8 in.	16 in.	10U
RLB-KIT-16P	Rack light bar kit	4.4W	273	Proximity	5/8 in.	5/8 in.	16 in.	10U
RLB-KIT-40	Rack light bar kit	12W	780	Rocker	5/8 in.	5/8 in.	40 in.	24U
RLB-KIT-40P	Rack light bar kit	12W	780	Proximity	5/8 in.	5/8 in.	40 in.	24U
RLB-KIT-60	Rack light bar kit	18W	1170	Rocker	5/8 in.	5/8 in.	60 in.	35U
RLB-KIT-60P	Rack light bar kit	18W	1170	Proximity	5/8 in.	5/8 in.	60 in.	35U

## Light Bar Mounting Locations

For racks with rear rails, install the light bar in the inside corner of the rail.



For racks without rear rails, install the light bar in a rear corner of the rack.



## Switch Mounting Locations

ROCKER SWITCH (Manual on/off)




Hidden location behind knockout panel.

PROXIMITY SWITCH (Automatic on/off when presence is detected)



Hidden location behind knockout panel.

## Hardware

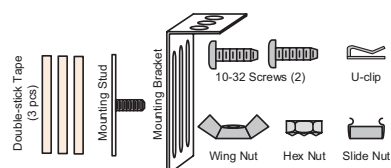

Includes mounting brackets, hardware and double-faced tape pads to mount switch virtually anywhere inside or outside rack.

## Power Supply Hook-up

