

COOLE

Blizzard Lighting, LLC

Phone: 1.866.493.6025 Fax: 1.866.870.0031

Email: info@blizzardlighting.com Website: http://www.blizzardlighting.com

RGBAW+UV LED Mini Moving Wash

The Flurry™ EXA builds on one of our most popular, superaffordable moving head washes, the Flurry™ Series and takes it to the next level with 4x 15-watt 6-in-1 RGBAW+UV LEDs for pure, immaculate, and richly saturated color mixing.

Super small and compact, the Flurry™ EXA features 540° pan and 220° tilt with built-in programs, color macros, and sound active via DMX or Master/slave modes make the Flurry™ EXA a breeze to operate at any experience level.

It also features variable electronic strobe, vector speed control for multiple channels, user-selectable pan and tilt ranges, and built-in movement macros.


When you need color, and lots of it, the Flurry™ EXA really fits the bill!

Main Features

- 4* 15W ultra-bright 6-in-1 RGBAW+UV LEDs
- Pan: 540°/ Tilt: 220° (8-16 Bit Resolution)
- · 25° beam angle
- Excellent, portable, moving head wash fixture
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- · Ultra-smooth 16-bit dimming system
- Defeatable pan/tilt correction w/trim adjustment
- · Intelligent fan cooling system
- 1-10Hz/second strobe effects
- 3-pin male input and 3-pin female output
- · Compact, high quality housing

Photometric Data

25° Beam Angle LUX (All Colors)

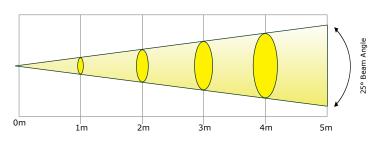

3,488 @ 1m	898 @ 2m	402 @ 3m	232 @ 4m	138 @ 5m
------------	----------	----------	----------	----------





Power

- Voltage: 110-240VAC, 50/60 Hz
- Power Consumption: 52W, .76A, PF: .64

Movement Range

• Pan: 540°/ Tilt: 220° (8-16 Bit Resolution)

Thermal

• Max. Operating Temp.: 104 degrees F (40 degrees C) ambient

Control

- Protocol: USITT DMX-512
- DMX Channels: 15
- Input: 3-pin XLR Male
- Output: 3-pin XLR Female
- Standalone, Master/Slave, Auto, Sound Active

Weight & Dimensions

- Dimensions: 7.7 x 7.9 x 12.5 in. (19.6 x 20.1 x 31.7 cm)
- Weight: 7.7 lbs (3.5 kg)

Warranty

• 2-year limited warranty, does not cover malfunction caused by damage to LEDs