

Specifications

Curtan Tura		Full serves Develop Develop Trans
System Type		Full range Powered Speaker, Bass-reflex Type
Frequency Range (-10dB)		77Hz-20kHz
Measured Maximum SPL (Peak) / Pink noise @1m		115 dB SPL
LF	Diameter	4" (10cm) Cone
	Voice coil	1.0"
	Magnet	Ferrite
Dimensions (WxHxD, without rubber feet)		142 x 196 x 187 mm
Net Weight		2.1 kg
Screw threads (bottom)		2 x M5 depth 11mm pitch 60mm (for 2 x M5 x 6~10mm screws)
		1 x 3/8" depth 12mm (for 1 x 3/8" x 9~11mm screw)
Amplifier Type		Class-D
Power Rating *1	Dynamic	30W
	Continuous	20W
Cooling		Natural cooling (no fan)
Connectors	Input	INPUT (Front): Combo, LINE INPUT 1: Stereo mini, LINE INPUT 2: Phone(TRS)
	Output	Phone (TRS) x1
	Power	IEC AC inlet x1
Input Impedance		INPUT (Front): LINE: 5.4 kΩ, MIC: 5.4 kΩ, LINE INPUT 1, 2: 10 kΩ
Input Sensitivity (VOLUME: Maximum)		INPUT (Front): LINE: -10 dBu, MIC: -40 dBu, LINE INPUT 1, 2: -10 dBu
Nominal Input Level (VOLUME: Center)		INPUT (Front): LINE: +5 dBu, MIC: -25 dBu, LINE INPUT 1, 2: +5 dBu
Maximum Input Level		INPUT (Front): LINE: +20 dBu, MIC: -10 dBu, LINE INPUT 1, 2: +20 dBu
Controls		VOLUME x1, LOW CONTROL x1, HIGH CONTROL x1, POWER
Indicators (LED)		POWER (Green)
Idle Power Consumption		3 W
1/8 Power Consumption		10 W
Power Requirements		100V - 240V, 50/60Hz

Block Diagram




Master EQ MASTER Ø HIGH SPEAKER Full range MASTER VOLUME



Dimensions

0.0000 187mm

179mn



Optional Brackets



BWS20-120

Wall Mounting brackets



Wall Mounting brackets BWS20-190





Ceiling Bracket BCS20-210

Mic Stand Adaptor BMS-10A





Free-Angle Clamp BAS-10

WYAMAHA Make Waves

YAMAHA CORPORATION P.O.BOX1, Hamamatsu Japan

https://www.yamaha.com/2/proaudio/


*All specifications are subject to change without notice. *All trademarks and registered trademarks are property of their respective owners.

2021.11







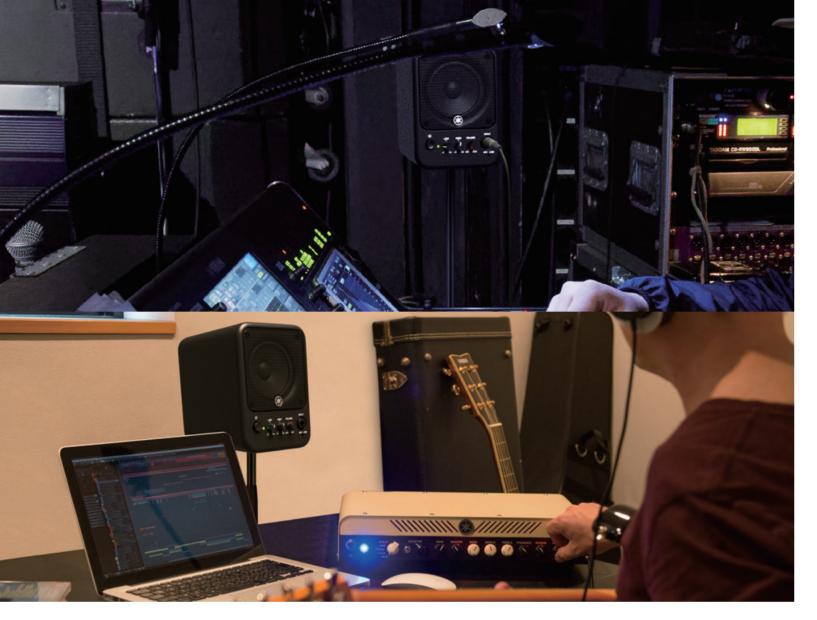

THE DE FACTO STANDARD FOR COMPACT MONITORING IN A SIMPLE FORM

The standard model in our range of desktop utility powered monitors, the MS101-4 offers portability in a compact design and simple but comprehensive functions for outstanding usability. The MS101-4 comes with a 3/8-16 threaded female mounting for direct attachment to a Euro microphone stand, and optional accessories can also be added for use in a wide range of applications.

- 30W of amplifier power provides clean, high output sound
- Redesigned enclosure for an even lower profile
- Combo Input jack accepts both XLR and 1/4" connectors
- Directly mountable on Euro microphone stands (Optional mic stand adaptor BMS10-A is available for adjusting tilt angle)

POWERED MONITOR SPEAKER

A compact, convenient approach to high-quality monitoring anywhere

Yamaha's smallest powered monitor speaker compatible with both line and mic inputs, the MS101-4 powered monitor speaker offers the flexibility needed for temporary or permanent use in applications requiring simple, compact monitors.



Simple, portable, durable design

With the controls (power switch, volume and tone controls) and the combo jack input on the lower front panel, the MS101-4 is simple and easy to operate.

The sturdy metal grill offers complete protection for the four-inch cone driver, while the rear features a power cord that can be easily removed for transport.

The $\dot{\rm M}{\rm S101-4}$ offers a compact, lightweight form that is both portable and durable.

Set up Examples

