

### DESCRIPTION


The T-02S is a line input module to be used in conjunction with the 900 series components and other TOA's equipment. It has a transformer unbalanced line input with Music-On-Hold (MOH) output and screw terminals, and gain controls.

### SPECIFICATIONS

\* 0 dB=1 V

Power Source	24 V DC (supplied from the main frame)
Current Consumption	38 mA
Sensitivity	AUX Input : Adjustable -20 - 0 dB* Line Output: Adjustable -16 - 0 dB* (at 600 Ω terminated, input: -20 dB*)
Source Impedance	AUX Input : 220 kΩ, unbalanced transformer-isolated Line Output: 600 Ω, balanced transformer-isolated
Frequency Response	20 Hz - 20 kHz ±2.5 dB
Distortion	0.1 % or less (1 kHz, output: 0 dB*)
Noise Level	-90 dB* (20 Hz - 20 kHz BPF)
Gain	Mix bus: -20 - 0 dB/slave: 4 - 20 dB
Connector	5 Screw terminals
Dimensions	35 (W) × 78 (H) × 88 (D) mm (1.38" × 3.07" × 3.46")
Weight	Max. 105 g (0.23 lb)

### APPEARANCE

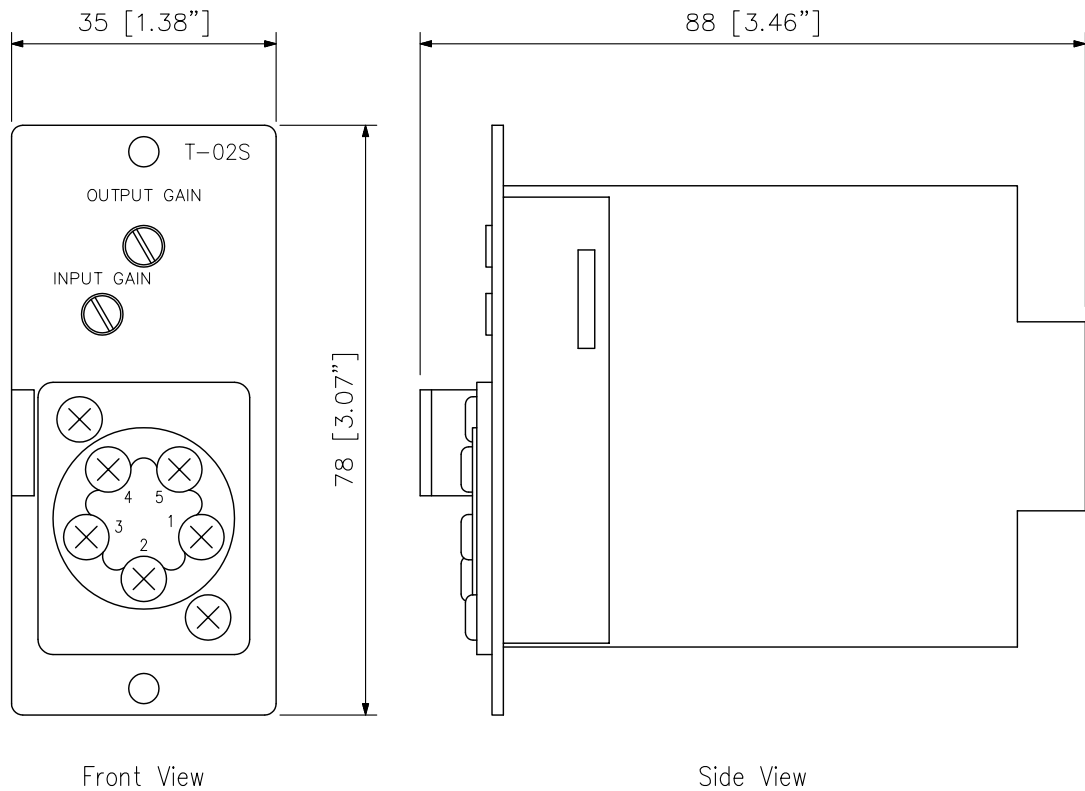

CONNECTION	
1	:Earth
2	:Cold
3	:Hot
4	:Hot
5	:Earth

} Output  
} Input

UNIT:mm SCALE:1/1