



Product Spec Sheet
Blu-ray Disc Player
BD-01U



■ **Specifications**

General

• **Signal system**

NTSC Color (for USA/Canada model), NTSC/PAL Color (for Europe model)

• **Power requirements**

AC 120 V, 60 Hz (for USA/CANADA model), AC 230 V, 50 Hz (for Europe model)

• **Power consumption**

12 W

• **Operating temperature**

41° F (5° C) to 95° F (35° C)

• **Operating humidity**

Less than 80 % (no condensation)

• **Dimensions (width x height x depth)**

19-1/16 x 1-13/16 x 10-3/16 inches (483 x 45 x 257.8 mm)

• **Weight**

4.98 lbs (2.26 kg)

Terminals

•HDMI OUTPUT

HDMI jack, 19-pin, Type A

Video: 480p/576p*, 720p, 1080i, 1080p, 1080p24 / Audio

* 576p: For Europe model.

•ANALOG OUTPUTS (UNBALANCED)

RCA jack

Reference Output Level: -10 dBV (0.316 Vrms)

Maximum Output Level: +6 dBV (2.0 Vrms)

Output impedance: 200 Ω

•ANALOG OUTPUTS (BALANCED)

XLR-3-32(1: GND, 2: HOT, 3: COLD)

Reference Output Level: +4 dBu (1.23 Vrms)

Maximum Output Level: +20 dBu (7.75 Vrms)

Output impedance: 100 Ω

•DIGITAL OUTPUTS

RCA jack

Compatible Signal Format: IEC-60958-3 (S/PDIF)

Output impedance: 75 Ω

Optical jack

Compatible Signal Format: IEC-60958-3 (S/PDIF)

•USB input

TYPE A, USB 2.0

Bus power current: MAX. 500 mA

•ETHERNET terminal

10BASE-T/100BASE-TX

•RS-232C

D-sub 9-pin

Audio

•BD Linear Audio

4 Hz-88 kHz (192 kHz)

•DVD Linear Audio

4 Hz-44 kHz (96 kHz), 4 Hz-22 kHz (48 kHz)

•Audio CD

20 Hz-20 kHz (44.1 kHz)

•Frequency Response

20 Hz - 20 kHz, +/-1.0 dB (during playback, JEITA)

•THD (Total Harmonic Distortion)

0.01 % (1 kHz) (during playback, JEITA)

•Signal to Noise Ratio

90 dB (during playback, JEITA)

•Audio Dynamic Range

90 dB (during playback, JEITA)


•Channel Separation

90 dB (during playback, JEITA)

Media & Disc type & File format

Media	Disc type	Format
Blu-ray	BD-RE (V2.1):First layer/Second layer BD-R (V1.1/1.2/1.3):First layer/Second layer	BDMV, JPEG, MP3, WMA, WAV
	BD-Video (USA/JAPAN:Region A, EUR:Region B)	
DVD	DVD-RW DVD-R	VR, AVCHD, JPEG, MP3, WMA, WAV
	DVD-Video (USA:Region 1, All, JAPAN/EUR:Region 2, All)	
CD	CD-RW CD-R CD-DA	JPEG, MP3, WMA, WAV
USB memory	FAT16/FAT32 (USB2.0)	JPEG, MP3, WMA, WAV
SD	FAT16:SD/miniSD/microSD FAT32:SDHC/miniSDHC/microSDHC *SD card can be played by connecting a USB card reader (not supplied) to this unit.	AVCHD, JPEG, MP3, WMA, WAV

■ Dimensional drawings

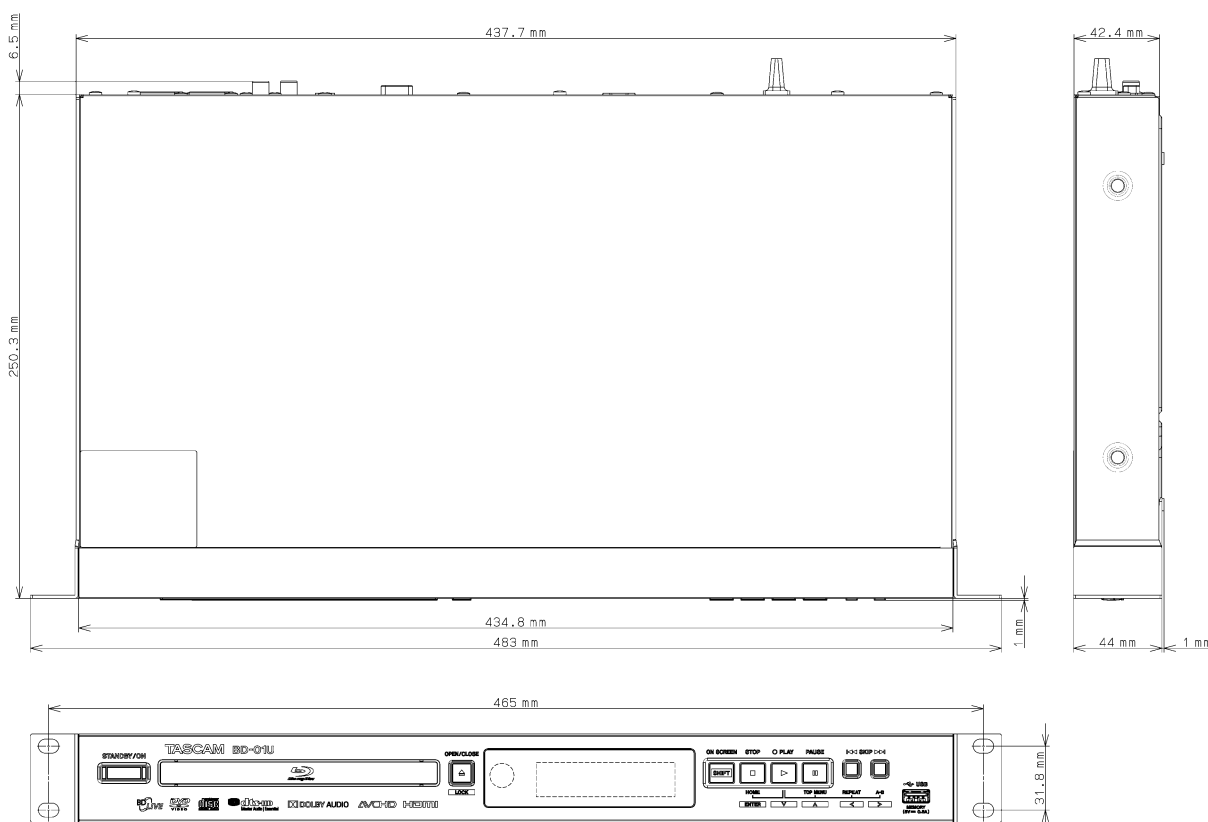

※TASCAM is trademark of TEAC CORPORATION, registered in the U.S. and other countries.
 ※Other company names, product names and logos are the trademarks or registered trademarks of their owners.
 ※Specifications and appearance are subject to change without notice.
 ※All information included in this document is as of Jun, 2016.